
Paratherm® Tapered Pre-Cut Products



Time- and Labor-Saving Products

Paratherm® Tapered Pre-Cut Polyiso

Maximize the efficiency of your installation with Paratherm® Tapered products. These products ship ready-to-install as part of your Tapered Design project and are also available a la carte. Either way, your crew can install panels at a faster rate without requiring skilled labor to do the cutting.

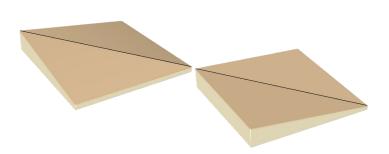

Pre-Cut Hips & Valleys

Paratherm® Tapered Pre-Cut Hips (slope outward) and Valleys (slope inward) are transitions where slopes meet each other on a 45 degree angle. These panels are traditionally field fabricated on the jobsite and create 50% waste per hip or valley. Paratherm® Tapered Pre-Cut Hips and Valleys arrive pre-cut, assembled, and ready to install minimizing excess material waste. These hips and valleys can help save time, labor, and waste on installation.

Product Availability:

- Any tapered panel designation, all slopes
- Paratherm® G Tapered, 20 or 25 psi
- Paratherm® G CG Tapered, 20 or 25 psi
- Paratherm® NH Tapered, 20 or 25 psi
- Paratherm® NH CG Tapered, 20 or 25 psi

Packaging:

 Same pieces per unit as a standard panel designation of 4' x 4' bundle of tapered insulation

Pre-Cut Sumps

Paratherm® Tapered Pre-Cut Sump is a 4' x 4' tapered accessory whose function is to drive water to the lowest point of slope on the roof, at the drain, in a 4-way design. Tapered sumps are commonly field fabricated, which takes skilled labor to cut and install the panels, which results in a lot of waste. Paratherm® Tapered Pre-Cut Sumps arrive assembled with circle guide marks in the center to assist in cutting the hole for the drain. These sumps save time, labor, and waste on installation.

Product Availability:

Paratherm® G CG Tapered 25 psi

Pre-cut Sump Packaging:

Sump	Thickness	Pieces per Package
Q1	0.5" – 1.5"	32
Q2	1.5" - 2.5"	19

¹ All tapered Pre-Cuts have limited plant availability. Contact sales for more information.