


MECHANICALLY ATTACHED ASSEMBLY WITH INTERMEDIATE FASTENER ROWS PARASOLO ROOF MEMBRANE - INSULATED (ALL SYSTEMS)

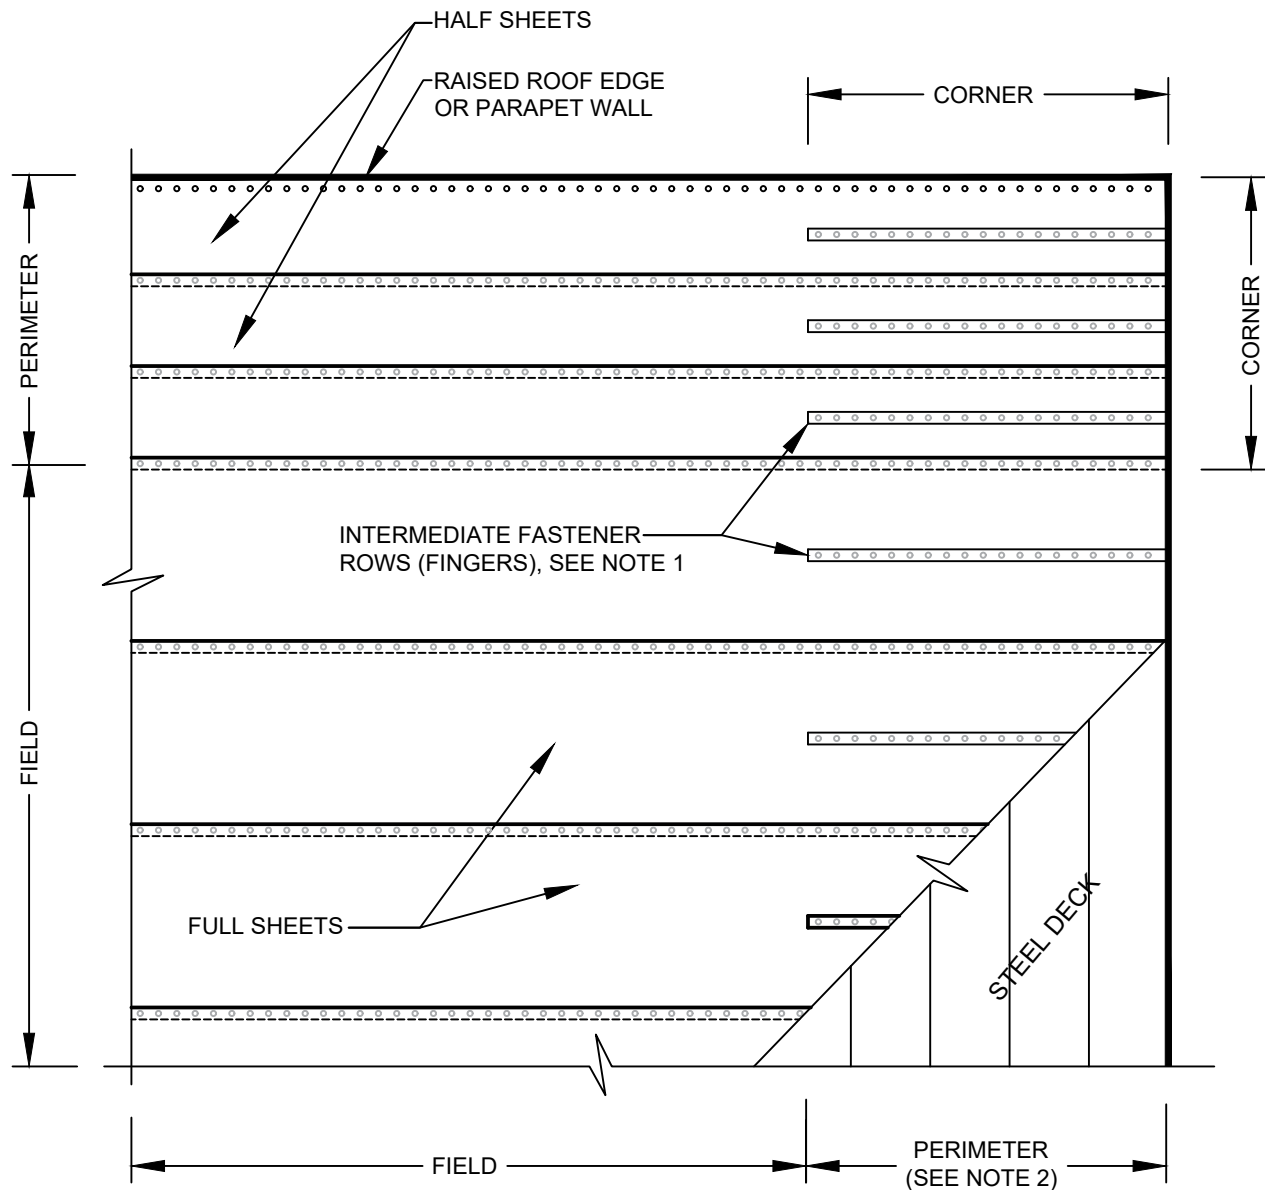

NOTES:

1. INTERMEDIATE ROWS OF FASTENERS (FINGERS) MAY BE INSTALLED THROUGH THE SHEET WITH A COVER STRIP OR AN ADDITIONAL MEMBRANE PLY OVER FASTENERS, IN ACCORDANCE WITH SIPLAST'S REQUIREMENTS.
2. REFER TO LOCAL BUILDING CODES, PROJECT MANUAL OR DOCUMENTATION FROM THE AUTHORIZED BUILDING DESIGNER FOR PROJECT SPECIFIC FASTENING PATTERNS TO MEET WIND UPLIFT REQUIREMENTS. WIDTH OF THE ROOF PERIMETER AND CORNER REGIONS MUST BE DETERMINED IN ACCORDANCE WITH THE APPLICABLE CODE APPROVAL AGENCY AND/OR THE PROJECT DESIGN AUTHORITY TO MEET WIND UPLIFT REQUIREMENTS.

Scale: NTS

MECHANICALLY ATTACHED ASSEMBLY - INTERMEDIATE FASTENER ROWS - INSULATED

Detail Number:
DE-6204



14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254

(800) 922-8800

www.siplast.com

Rev: 06.08.2023