
## **TERANAP GREEN ROOF**

## **CONCRETE**

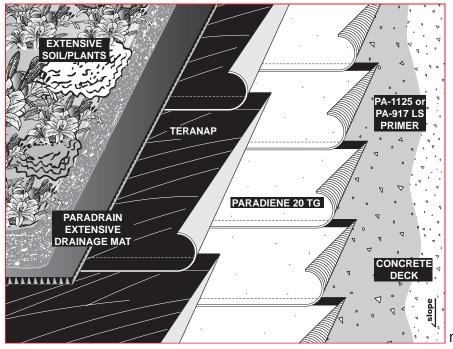

SLOPE 0" - 1/2" per ft\*

**MATERIALS** per 100 sq ft

**PA-1125 or PA-917 LS PRIMER** 1 gal **PARADIENE 20 TG** 76 lb **TERANAP** 105 lb PARADRAIN EXTENSIVE DRAINAGE MAT 25 lb SOIL/PLANTS

Contact Siplast for higher slope requirements.

n.t.s.

Requirements and recommendations detailed in the Siplast catalog and Siplast long form specifications shall apply in addition to the following recommendations and specifications.

## **Application**

- 1. Prime the entire deck using PA-1125 or PA-917 LS Primer and allow the primer to dry thoroughly.
- Beginning at the low point of the roof, fully torch one ply of the Paradiene 20 TG to the primed substrate, lapping sides and ends a minimum of 3 inches. Offset end laps a minimum of 3 feet.
- Beginning again at the low point of the roof, fully torch one ply of Teranap to the Paradiene 20 TG surface, lapping sides and ends a minimum of 6 inches. Offset end laps a minimum of 3 feet. Stagger laps between plies.
- 4. Lay one layer of Paradrain Extensive Drainage Mat dry over the finished Teranap surface.
- 5. Install soil and plants as specified.

Note: Teranap is manufactured in both 1 meter and 2 meter widths. The Teranap weight shown above is a minimum weight for standard 2 meter wide Teranap. Contact Siplast for weights on other Teranap finish plies.

**Caution:** Siplast recommends that all practices pertaining to NRCA CERTA guidelines be followed when torching methods are employed. This includes performing a fire watch following any torch applications. Always have approved fire-extinguishing equipment nearby.

Ref #: P20-tg Tnap Concrete Drain-mat Ext-plants

Rev: 10.13.11

