


**EXTENSIVE LAYERED ASSEMBLY**  
**PARAGREEN MINERAL WOOL ASSEMBLY - IRMA - PARAPRO**

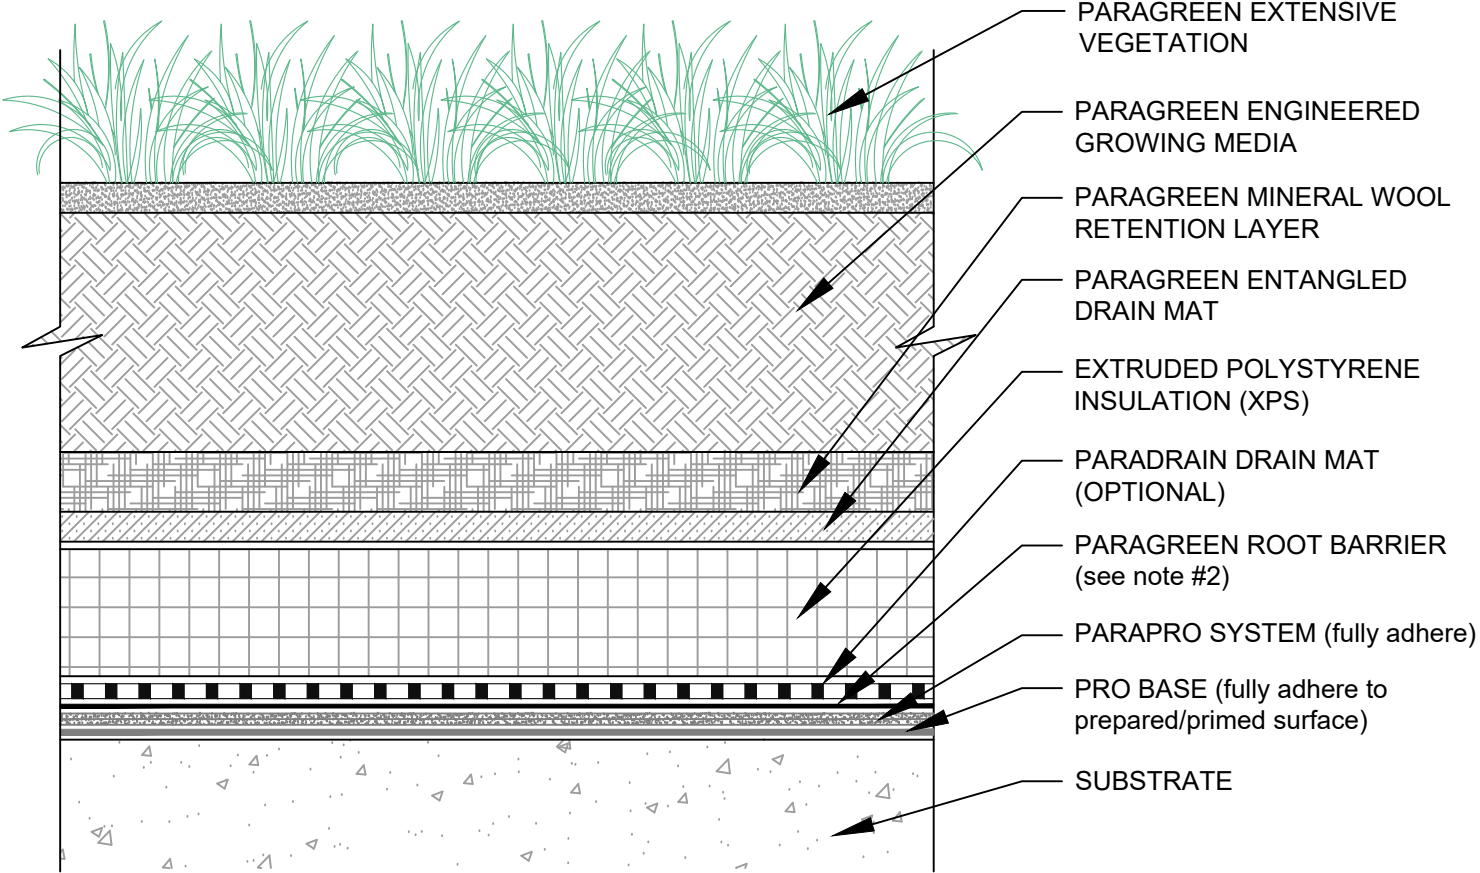

- NOTES:
- 1. THE VEGETATED ROOF ASSEMBLY IS SHOWN FOR REFERENCE PURPOSES ONLY. DIMENSIONS OF COMPONENTS WILL VARY ACCORDING TO SPECIFIC BUILDING SIZE, INSULATION, GROWING MEDIUM AND PERIMETER COMPONENTS.
  - 2. ROOT BARRIER IS OPTIONAL WITH PARAPRO OR PARAFLEX MEMBRANE SYSTEMS.
  - 3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.
  - 4. DESIGNER OF RECORD TO VERIFY CAPACITY OF DECK/SUBSTRATE TO ACCOMMODATE LOAD OF THE OVERBURDEN COMPONENTS.

CAUTION: SIPLAST RECOMMENDS THAT ALL PRACTICES PERTAINING TO INDUSTRY STANDARD TORCH SAFETY REQUIREMENTS AND GUIDELINES BE FOLLOWED. THIS INCLUDES PERFORMING A FIRE WATCH FOLLOWING ANY TORCH APPLICATIONS. ALWAYS HAVE APPROVED FIRE EXTINGUISHING EQUIPMENT NEARBY WHEN USING A TORCH.

Scale: NTS

REF: PARAGREEN MINERAL WOOL ASSEMBLY - IRMA - PARAPRO

**Detail Number:**  
**DE-VEG-46-07p**



**14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254 (800) 922-8800**

**www.siplast.com**

**Rev: 02.06.2024**