


# TERANAP PLAZA DECK

## PROTECTION COURSE/PEDESTAL/PAVER SYSTEM

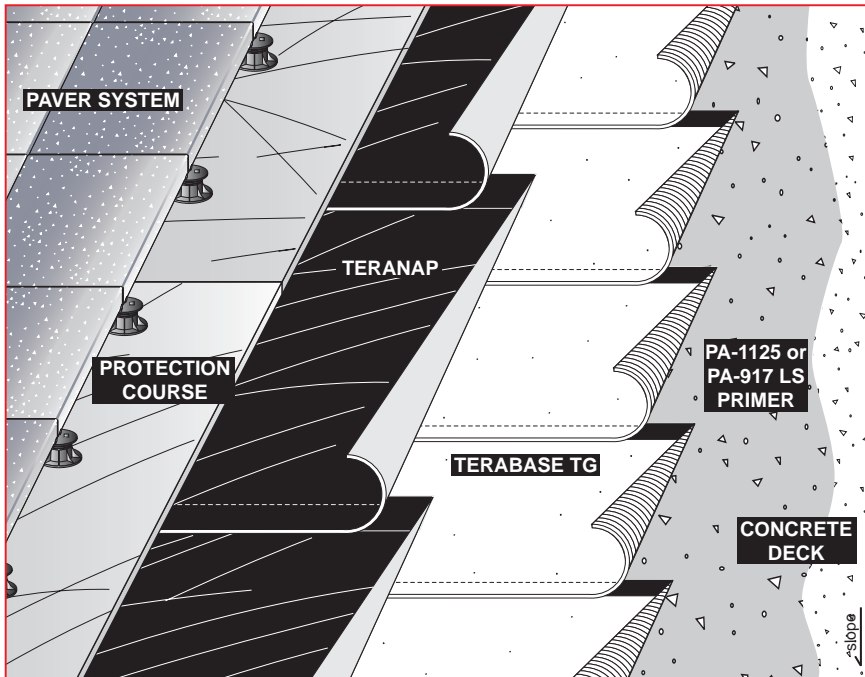

SLOPE 0" - 1/2" per ft\*

MATERIALS per 100 sq ft

PA-1125 or PA-917 LS PRIMER 1 gal  
TERABASE TG 76 lb  
TERANAP 105 lb  
PROTECTION COURSE  
PEDESTAL  
PAVER SYSTEM

\* Contact Siplast for higher slope requirements.

n.t.s.

### Specification: PDCT-BP

Requirements and recommendations detailed in the Siplast catalog and Siplast long form specifications shall apply in addition to the following recommendations and specifications.

### Application

1. Prime the entire deck using PA-1125 or PA-917 LS Primer and allow the primer to dry thoroughly.
2. Beginning at the low point of the roof, fully torch one ply of Terabase TG to the primed substrate, lapping both sides and ends a minimum of 3 inches. Offset end laps a minimum of 3 feet.
3. Beginning again at the low point of the roof, fully torch one ply of Teranap to the Terabase TG surface, lapping sides and ends a minimum of 6 inches. Offset end laps a minimum of 3 feet. Stagger laps between plies.
4. Install the approved protection course according to the manufacturer's specifications and recommendations. Protection course can be continuous or cut to size to properly support the pedestal footprint and placed under each pedestal.
5. Ballast the system with an approved pedestal paver system according to the paver manufacturer's specifications and recommendations.

**Notes:** Teranap is manufactured in both 1 meter and 2 meter widths. The Teranap weight shown above is a minimum weight for standard 2 meter wide Teranap. Contact Siplast for weights on other Teranap finish plies.

Siplast recommends that all practices pertaining to NRCA CERTA guidelines be followed when torching methods are employed. This includes performing a fire watch following any torch applications. Always have approved fire-extinguishing equipment nearby.



1000 East Rochelle Boulevard Irving, Texas 75062 (800) 922-8800 FAX (469) 995-2206

Ref #: 7172 CBPP  
Rev: 10.29.08



An Icopal Group Company