



Paraguard Extender

ORDER/SPECIFICATION FORM

MODEL NUMBER


STANDARD FACE DIMENSIONS

- PFE 400 PFE 800
 PFE 600 PFE 1000

- CUSTOM DIMENSIONS
 (FOR NON-STANDARD SIZES)

A = _____

C = _____

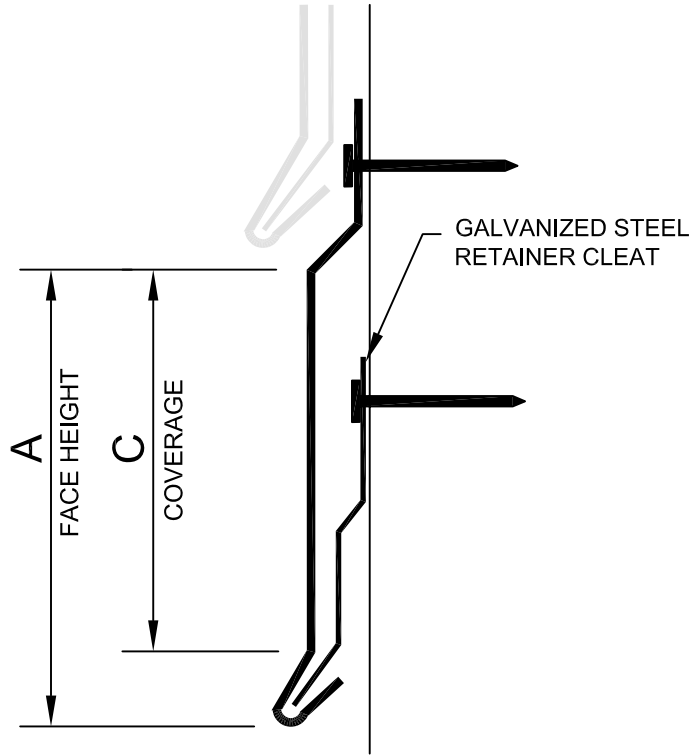

Standard Sizes							
Fascia Model	Fascia Face Height "A"		Max. Coverage "C"		Recommended Minimum Thickness		Retainer Cleat Gauge
	in	mm	in	mm	in	mm	
PFE 400	4	76	3 $\frac{3}{8}$	86	.040	24	22
PFE 600	6	152	5 $\frac{3}{8}$	137	.040	24	22
PFE 800	8	203	7 $\frac{1}{8}$	187	.050	24	22
PFE 1000	10	254	9 $\frac{3}{8}$	238	.050	24	22

QUANTITY:

_____ FT. TOTAL PERIMETER

_____ PCS. STOCK @ 10'0"

_____ PCS STD. O.S. CORNER

_____ PCS STD. I.S. CORNER

_____ CUSTOM ACCESSORIES
(attach sketch)

CAP MATERIAL

- ALUMINUM
 GALV. STEEL
 STAIN. STEEL

THICKNESS

- 0.032"
 0.040"
 0.050"
 0.063"
 24 GAUGE

FINISH

- COIL KYNAR
 SPRAY KYNAR
 MILL
 CLEAR ANODIZED
 BRONZE ANODIZED
 BLACK ANODIZED

SIPLAST PARAGUARD COLOR: SP _____

JOB NAME: _____ JOB NO: _____

LOCATION: _____

SHIP TO ADDRESS: _____

CONTRACTOR APPROVAL:

APPROVED FOR FABRICATION

APPROVED WITH CHANGES

CONTRACTOR NAME

DATE

CONTRACTOR REPRESENTATIVE

CONTRACTOR SIGNATURE