
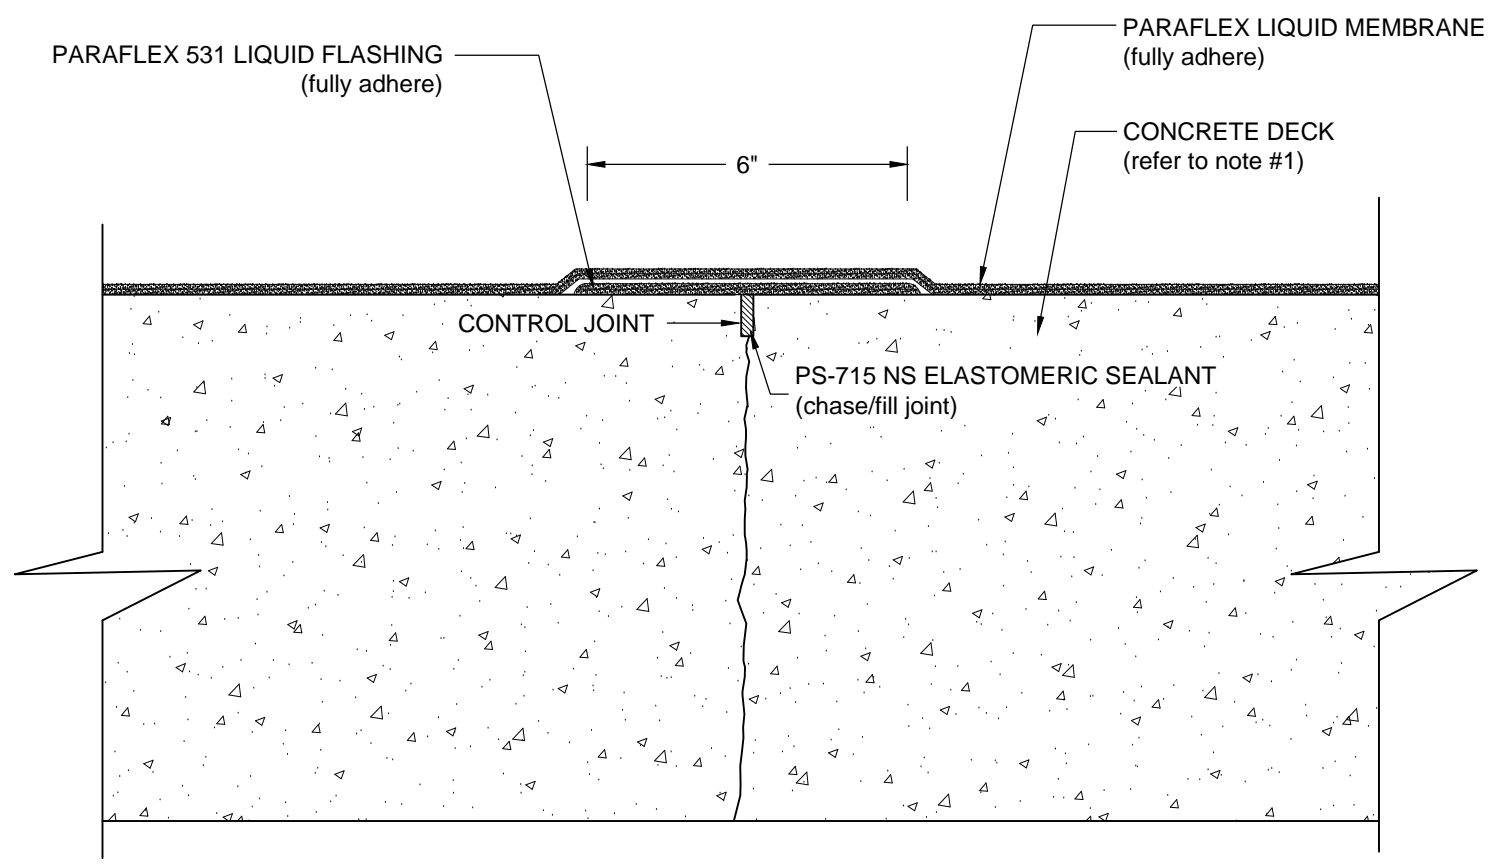


CONTROL JOINT

PARFLEX LIQUID MEMBRANE - CONCRETE SUBSTRATE

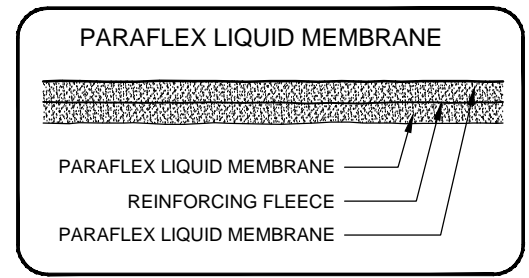

NOTES:

1. REFER TO SIPLAST PREPARATION GUIDELINES FOR PROPER SURFACE TREATMENT OF ALL MATERIALS PRIOR TO APPLICATION OF PARAFLEX MATERIALS.
2. FOR JOINTS WIDER THAN 5mm, CONSIDER INSERTING A POLYETHYLENE BACKER ROD INTO THE JOINT PRIOR TO APPLICATION OF PS-715 NS ELASTOMERIC SEALANT
3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS AND THE PARAFLEX LIQUID MEMBRANE SYSTEM INSTALLER'S GUIDE SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

N.T.S

