



# Paraguard Extender

## ORDER/SPECIFICATION FORM

### MODEL NUMBER


#### STANDARD FACE DIMENSIONS

- PFE 400     PFE 800  
 PFE 600     PFE 1000

- CUSTOM DIMENSIONS  
 (FOR NON-STANDARD SIZES)

A = \_\_\_\_\_

C = \_\_\_\_\_

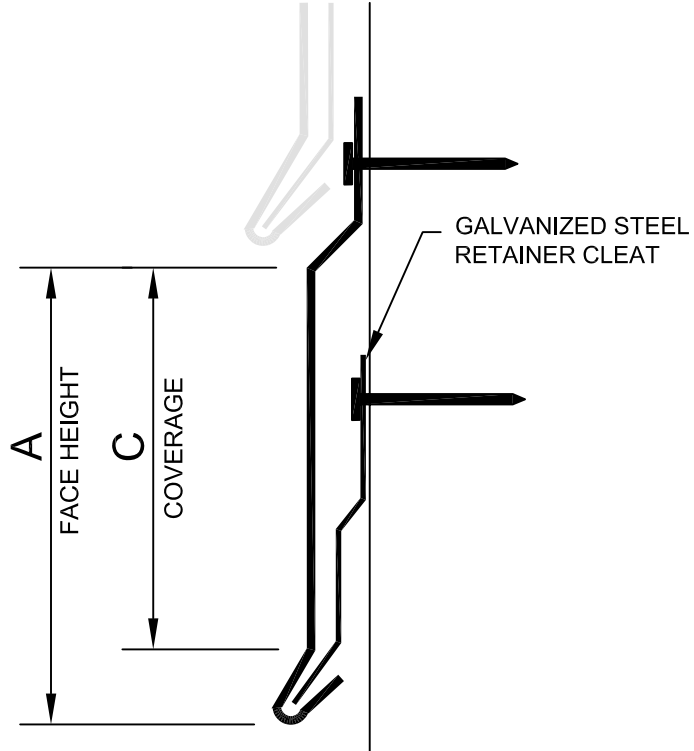

### QUANTITY:

\_\_\_\_\_ FT. TOTAL PERIMETER

\_\_\_\_\_ PCS. STOCK @ 10'0"

\_\_\_\_\_ PCS STD. O.S. CORNER

\_\_\_\_\_ PCS STD. I.S. CORNER

\_\_\_\_\_ CUSTOM ACCESSORIES  
 (attach sketch)

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Standard Sizes							
Fascia Model	Fascia Face Height "A"		Max. Coverage "C"		Recommended Minimum Thickness		Retainer Cleat Gauge
	in	mm	in	mm	in	mm	
PFE 400	4	76	3 $\frac{3}{8}$	86	.040	24	22
PFE 600	6	152	5 $\frac{3}{8}$	137	.040	24	22
PFE 800	8	203	7 $\frac{1}{8}$	187	.050	24	22
PFE 1000	10	254	9 $\frac{3}{8}$	238	.050	24	22

### CAP MATERIAL

- ALUMINUM  
 GALV. STEEL  
 STAIN. STEEL

### THICKNESS

- 0.032"  
 0.040"  
 0.050"  
 0.063"  
 24 GAUGE  
 \_\_\_\_\_

### FINISH

- COIL KYNAR  
 SPRAY KYNAR  
 MILL  
 CLEAR ANODIZED  
 BRONZE ANODIZED  
 BLACK ANODIZED

SIPLAST PARAGUARD COLOR: SP \_\_\_\_\_

JOB NAME: \_\_\_\_\_ JOB NO: \_\_\_\_\_

LOCATION: \_\_\_\_\_

SHIP TO ADDRESS: \_\_\_\_\_

### CONTRACTOR APPROVAL:

APPROVED FOR FABRICATION

APPROVED WITH CHANGES

\_\_\_\_\_ CONTRACTOR NAME

\_\_\_\_\_ DATE

\_\_\_\_\_ CONTRACTOR REPRESENTATIVE

\_\_\_\_\_ CONTRACTOR SIGNATURE