


# CONCRETE OR GYPSUM

nailable

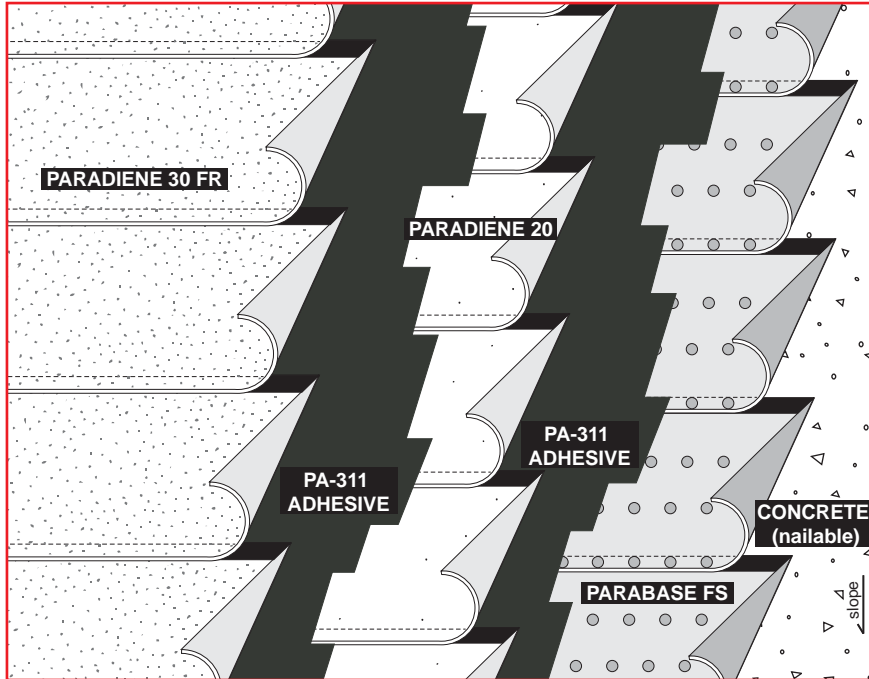

**SLOPE** ¼" - 2 ½" per ft\*

**MATERIALS** per 100 sq ft

PARABASE FS	20 lb
PA-311 ADHESIVE	1 ½ - 2 ½ gal
PARADIENE 20	62 lb
PA-311 ADHESIVE	1 ½ gal
PARADIENE 30 FR	90 lb

\* Contact Siplast for higher or lower slope requirements.

n.t.s.

## Specification: 2030 CBA

Requirements and recommendations detailed in the Siplast catalog and Siplast long form specifications shall apply in addition to the following recommendations and specifications.

### Application

1. Lay one ply of Parabase FS dry over the entire area to be roofed. Lap each sheet 3 inches over the underlying sheet and lap ends 6 inches. Using the approved fasteners, nail each sheet every 9 inches through the laps and stagger nail the remainder of the sheet in two rows on nominal 12 inch centers with fasteners in each row on 12 inch centers. *The fastening pattern shown in the specification is based on Siplast standard nailing requirements. Contact Siplast for recommended fastening patterns to meet specific testing or code approvals.*
2. Beginning at the low point of the roof, lay one ply of the Paradiene 20 in a full coating of PA-311 Adhesive, lapping sides and ends a minimum of 3 inches. Offset end laps a minimum of 3 feet.
3. Beginning again at the low point of the roof, fully adhere one ply of Paradiene 30 FR to the Paradiene 20 surface using PA-311 Adhesive, lapping sides and ends a minimum of 3 inches. Offset end laps a minimum of 3 feet. Stagger laps between plies.

**Note:** Venting provisions must be incorporated into lightweight insulating concrete designs.

Ref. #: P20-a P30-a LWC-base  
Date: 11.2.09



1000 East Rochelle Boulevard Irving, Texas 75062 (800) 922-8800 FAX (469) 995-2206



An Icopal Group Company