

Packaging / Shipping Chart for

Paratherm™ G Tapered, Paratherm™ G CG Tapered,
Paratherm™ NH Tapered, Paratherm™ NH CG Tapered



With you every step of the way™

Physical Characteristics				Shipping Information (4' x 4') (1.22 m x 1.22 m) 4'x8' (1.22 m x 2.44 m) available upon special request†				
Slope	Thickness (Inches/Millimeters)	Size*	Average Thickness (Inches/Millimeters)	Board Feet Per Panel	Boards/ Bundle	Boards/ Truck	Bundle/ Truck	Sq. Ft. Per Truck
1/16" (1.6 mm)	0.5 – 0.75 (12.7 – 19.1)	1	0.625 (15.9)	10	72	3,456	48	55,296 (5,137 sq. m)
	0.75 - 1.0 (19.1 - 25.4)	2	0.875 (22.2)	14	52	2,496	48	39,936 (3,710 sq. m)
	1.0 - 1.25 (25.4 - 31.8)	3	1.125 (28.6)	18	40	1,920	48	30,720 (2,854 sq. m)
	1.25 - 1.5 (31.8 - 38.1)	4	1.375 (34.9)	22	32	1,536	48	24,576 (2,283 sq. m)
	1.5 - 1.75 (38.1 - 44.5)	5	1.625 (41.3)	26	28	1,344	48	21,504 (1,998 sq. m)
	1.75 - 2.0 (44.5 - 51.0)	6	1.875 (47.6)	30	24	1,152	48	18,432 (1,712 sq. m)
	2.0 - 2.25 (51.0 - 57.2)	7	2.125 (54.0)	34	20	960	48	15,360 (1,427 sq. m)
	2.25 - 2.5 (57.2 - 64.0)	8	2.375 (60.3)	38	18	864	48	13,824 (1,284 sq. m)
1/8" (3.2 mm)	0.5 - 1.0 (12.7 - 25.4)	AA†	0.75 (19.1)	12	64	3,072	48	49,152 (4,566 sq. m)
	1.0 - 1.5 (25.4 - 38.1)	A†	1.25 (31.8)	20	38	1,824	48	29,184 (2,711 sq. m)
	1.5 - 2.0 (38.1 - 51.0)	B†	1.75 (44.5)	28	26	1,248	48	19,968 (1,855 sq. m)
	2.0 - 2.5 (51.0 - 64.0)	C†	2.25 (57.2)	36	20	960	48	15,360 (1,427 sq. m)
	2.5 - 3.0 (64.0 - 76.2)	D	2.75 (70.0)	44	16	768	48	12,288 (1,142 sq. m)
	3.0 - 3.5 (76.2 - 89.0)	E	3.25 (82.6)	52	14	672	48	10,752 (999 sq. m)
	3.5 - 4.0 (89.0 - 102.0)	F	3.75 (95.3)	60	12	576	48	9,216 (856 sq. m)
	4.0 - 4.5 (102.0 - 114.3)	FF	4.25 (108.0)	68	10	480	48	7,680 (713 sq. m)
3/16" (4.8 mm)	0.5 - 1.25 (12.7 - 31.8)	JJ	0.875 (22.2)	14	50	2,400	48	38,400 (3,567 sq. m)
	1.25 - 2 (31.8 - 51.0)	KK	1.625 (41.3)	26	26	1,248	48	19,968 (1,855 sq. m)
	2.0 - 2.75 (51.0 - 70.0)	LL	2.375 (60.3)	38	20	960	48	15,360 (1,427 sq. m)
	2.75 - 3.5 (70.0 - 89.0)	MM	3.125 (79.4)	50	15	720	48	11,520 (1,070 sq. m)
	1.0 - 1.75 (25.4 - 44.5)	J	1.375 (34.9)	22	34	1,632	48	26,112 (2,426 sq. m)
	1.75 - 2.5 (44.5 - 64.0)	K	2.125 (54.0)	34	22	1,056	48	16,896 (1,570 sq. m)
	2.5 - 3.25 (64.0 - 82.6)	L	2.875 (73.0)	46	16	768	48	12,288 (1,142 sq. m)
	3.25 - 4.0 (82.6 - 102.0)	M	3.625 (92.1)	58	12	576	48	9,216 (856 sq. m)
1/4" (6.35 mm)	0.5 - 1.5 (12.7 - 38.1)	X†	1.0 (25.4)	16	48	2,304	48	36,864 (3,425 sq. m)
	1.5 - 2.5 (38.1 - 64.0)	Y†	2.0 (51.0)	32	24	1,152	48	18,432 (1,712 sq. m)
	2.5 - 3.5 (64.0 - 89.0)	Z†	3.0 (76.2)	48	16	768	48	12,288 (1,142 sq. m)
	3.5 - 4.5 (89.0 - 114.3)	ZZ	4.0 (102.0)	64	12	576	48	9,216 (856 sq. m)
	1.0 - 2.0 (25.4 - 51.0)	G	1.5 (38.1)	24	32	1,536	48	24,576 (2,283 sq. m)
	2.0 - 3.0 (51.0 - 76.2)	H	2.5 (64.0)	40	18	864	48	13,824 (1,284 sq. m)
	3.0 - 4.0 (76.2 - 102.0)	I	3.5 (89.0)	56	12	576	48	9,216 (856 sq. m)
3/8" (9.5 mm)	0.5 - 2.0 (12.7 - 51.0)	SS	1.25 (31.8)	20	38	1,824	48	29,184 (2,711 sq. m)
	2.0 - 3.5 (51.0 - 89.0)	TT	2.75 (69.9)	44	16	768	48	12,288 (1,142 sq. m)
	1.0 - 2.5 (25.4 - 64.0)	S	1.75 (44.5)	28	27	1,296	48	20,736 (1,926 sq. m)
1/2" (12.7 mm)	0.5 - 2.5 (12.7 - 64.0)	Q†	1.5 (38.1)	24	32	1,536	48	24,576 (2,283 sq. m)
	2.5 - 4.5 (64.0 - 114.3)	QQ	3.5 (89.0)	56	12	576	48	9,216 (856 sq. m)
	1.0 - 3.0 (25.4 - 76.2)	XX	2.0 (51.0)	32	22	1,056	48	16,896 (1,570 sq. m)

* Availability for these tapered panel systems may vary for each region.

† 4' x 8' tapered panels are made upon special request at all GAF Polyiso Manufacturing facilities in all EnergyGuard products. Certain run minimums will apply. The piece count per bundle remains the same as in a 4' x 4' bundle. The boards per truck and bundles per truck would be half the numbers reflected above for.


Tapered Profiles for



With you every step of the way™

**Paratherm™ G Tapered, Paratherm™ G CG Tapered,
Paratherm™ NH Tapered, Paratherm™ NH CG Tapered**

Typical Standard Profiles

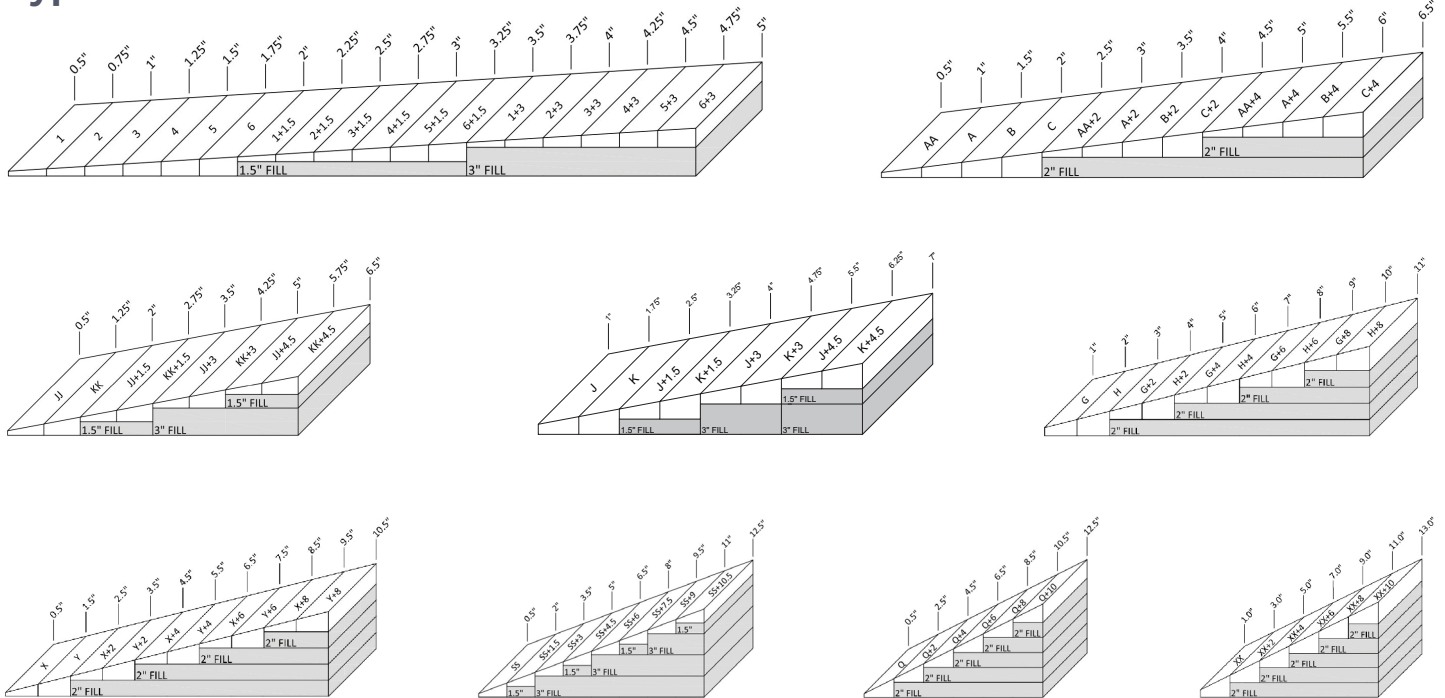

Typical Extended Profiles

