


Paratherm® G CG Tapered Polyiso Insulation

Sloped Polyiso with CGF Facers

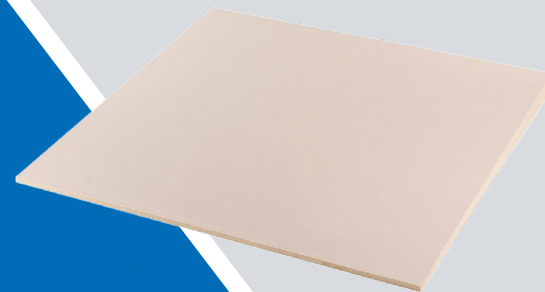

Description:


Paratherm® G CG Tapered polyiso insulation board is made of durable inorganic coated glass facers (CGF) bonded to a core of polyisocyanurate foam. Paratherm® G CG Tapered polyiso insulation offers high thermal performance, moisture and mold resistance for commercial roofing applications.

Features and Benefits:

- Prevents ponding water when properly installed on a low-slope roof by providing slope via a series of both tapered and flat polyiso fill panels
- Meets the requirements of ASTM D3273 for resistance to mold growth⁵
- Achieves an ANSI/UL 790 Class A roofing fire resistance rating over combustible deck without the use of a gypsum board or slip sheet when installed at a minimum 3" (75mm) thickness.
- Higher R-value per inch than other insulations such as EPS, XPS and Mineral Wool
- Easy to install — lightweight, easy to cut, easy to handle

System Approvals:

- Approved component in commercial roof systems, mechanically attached and adhered



- Refer to the applicable Siplast Technical Guide for detailed application information
- Recommended for Cold Storage applications or buildings with requiring additional moisture resistance

Codes & Compliance:

- Meets the requirements of ASTM C1289 Type II, Class 2, Grade 2 (20 psi), and also available Grade 3 (25 psi)
- FM Approved — refer to RoofNav.com for approved assemblies
- Classified by UL in accordance with ANSI/UL 1256 and 790. Refer to UL Product iQ for specific assemblies
- UL Evaluation Report UL ER1306-03
- Miami-Dade County Product Control Approved
- State of Florida Approved
- Meets the requirements of CAN/ULC 704.1 Type 2, Class 3 or Type 3 Class 3^{**}
- UL (Canada) Evaluation Report ULC ER10630-02^{**}



^{**}Manufacturing locations in UT and PA.

Panel Characteristics:

- Available in a variety of sizes: 4' x 4' (1.22 m x 1.22 m) and 4' x 8' (1.22 m x 2.44 m) boards upon special request
- Available in a variety of slopes: 1/8" (3.2mm), 3/16" (4.8 mm), 1/4" (6.35 mm), 3/8" (9.5 mm), 1/2" (12.7 mm)

Sustainability:

- Manufactured using CFC-, HCFC- and HFC-free foam blowing technology with zero ozone depletion potential (ODP) and virtually no (negligible) global warming potential (GWP).
- Potential LEED® Credits for Polyiso Use Health Product Declaration (HPD)
- UL GreenGuard Gold
- Environmental Product Declaration (EPD)



Tapered Design Team:

Our Tapered Design Group specialists are available within your region to assist you in all aspects of preplanning, design, and training. Contact the Tapered Design Department at tdg@siplast.com

Our product and services include:

- Load and Label by area
- Conceptual design assistance
- Quote review and comparison
- Plan and spec review
- Alternate design recommendations
- Job start-ups, trainings, and presentations
- Double packs

Paratherm® G CG Tapered Polyiso Insulation

Tapered Polyiso with CGF Facers

Typical Physical Property Data:

Property	Test Method	Value
Compressive Strength	ASTM D1621	Grade 2 – 20 psi min (138 kPa) Grade 3 – 25 psi min (172 kPa)
Dimensional Stability Change (length + width) †	ASTM D2126	< 2% linear change
Flexural Strength	ASTM C203	40 psi min (275 kPa)
Tensile Strength	ASTM C209	500 psf min (24 kPa)
Water Absorption (percent by volume)	ASTM C209	1.5% max
Water Vapor Permeance	ASTM E96, Procedure A	1.5 perm max (85.8 ng/Pa•s•m²)
Service Temperature		-100° F to 250° F (-73.3° C to 121.1° C)
Flame Spread Index ‡	ASTM E84	< 75 *
Smoke Developed Index	ASTM E84	< 200 *
Resistance to Mold §	ASTM D3273	Pass (10)

* Foam Core

† Stated dimensional stability tolerance: thickness shall not diminish by more than 4% max.

‡ These numerical ratings are not intended to reflect hazards presented by these or any other material under actual fire conditions.

§ Siplast warranties and guarantees do not provide coverage against mold or other biological growth. Refer to siplast.com for more information on warranty and guarantee coverage and restrictions.

Tapered Polyiso Physical Characteristics and Shipping Information

Physical Characteristics				Shipping Information (4' x 4') (1.22 m x 1.22 m) 4'x8' (1.22 m x 2.44 m) available upon special request††				
Slope	Thickness (Inches/Millimeters)	Size**	Average Thickness (Inches/Millimeters)	Board Feet Per Panel	Boards/ Bundle	Boards/ Truck	Bundle/ Truck	Sq. Ft. Per Truck
1/8" (3.2 mm)	0.5 - 1.0 (12.7 - 25.4)	AA††	0.75 (19.1)	12	64	3,072	48	49,152 (4,566 sq. m)
	1.0 - 1.5 (25.4 - 38.1)	A††	1.25 (31.8)	20	38	1,824	48	29,184 (2,711 sq. m)
	1.5 - 2.0 (38.1 - 51.0)	B††	1.75 (44.5)	28	26	1,248	48	19,968 (1,855 sq. m)
	2.0 - 2.5 (51.0 - 64.0)	C††	2.25 (57.2)	36	20	960	48	15,360 (1,427 sq. m)
	2.5 - 3.0 (64.0 - 76.2)	D	2.75 (70.0)	44	16	768	48	12,288 (1,142 sq. m)
	3.0 - 3.5 (76.2 - 89.0)	E	3.25 (82.6)	52	14	672	48	10,752 (999 sq. m)
	3.5 - 4.0 (89.0 - 102.0)	F	3.75 (95.3)	60	12	576	48	9,216 (856 sq. m)
	4.0 - 4.5 (102.0 - 114.3)	FF	4.25 (108.0)	68	10	480	48	7,680 (713 sq. m)
3/16" (4.8 mm)	0.5 - 1.25 (12.7 - 31.8)	JJ	0.875 (22.2)	14	50	2,400	48	38,400 (3,567 sq. m)
	1.25 - 2 (31.8 - 51.0)	KK	1.625 (41.3)	26	26	1,248	48	19,968 (1,855 sq. m)
	2.0 - 2.75 (51.0 - 70.0)	LL	2.375 (60.3)	38	20	960	48	15,360 (1,427 sq. m)
	2.75 - 3.5 (70.0 - 89.0)	MM	3.125 (79.4)	50	15	720	48	11,520 (1,070 sq. m)
	1.0 - 1.75 (25.4 - 44.5)	J	1.375 (34.9)	22	34	1,632	48	26,112 (2,426 sq. m)
	1.75 - 2.5 (44.5 - 64.0)	K	2.125 (54.0)	34	22	1,056	48	16,896 (1,570 sq. m)
	2.5 - 3.25 (64.0 - 82.6)	L	2.875 (73.0)	46	16	768	48	12,288 (1,142 sq. m)
	3.25 - 4.0 (82.6 - 102.0)	M	3.625 (92.1)	58	12	576	48	9,216 (856 sq. m)
1/4" (6.35 mm)	0.5 - 1.5 (12.7 - 38.1)	X††	1.0 (25.4)	16	48	2,304	48	36,864 (3,425 sq. m)
	1.5 - 2.5 (38.1 - 64.0)	Y††	2.0 (51.0)	32	24	1,152	48	18,432 (1,712 sq. m)
	2.5 - 3.5 (64.0 - 89.0)	Z††	3.0 (76.2)	48	16	768	48	12,288 (1,142 sq. m)
	3.5 - 4.5 (89.0 - 114.3)	ZZ	4.0 (102.0)	64	12	576	48	9,216 (856 sq. m)
	1.0 - 2.0 (25.4 - 51.0)	G	1.5 (38.1)	24	32	1,536	48	24,576 (2,283 sq. m)
	2.0 - 3.0 (51.0 - 76.2)	H	2.5 (64.0)	40	18	864	48	13,824 (1,284 sq. m)
	3.0 - 4.0 (76.2 - 102.0)	I	3.5 (89.0)	56	12	576	48	9,216 (856 sq. m)
3/8" (9.5 mm)	0.5 - 2.0 (12.7 - 51.0)	SS	1.25 (31.8)	20	38	1,824	48	29,184 (2,711 sq. m)
	2.0 - 3.5 (51.0 - 89.0)	TT	2.75 (69.9)	44	16	768	48	12,288 (1,142 sq. m)
	1.0 - 2.5 (25.4 - 64.0)	S	1.75 (44.5)	28	27	1,296	48	20,736 (1,926 sq. m)
1/2" (12.7 mm)	0.5 - 2.5 (12.7 - 64.0)	Q††	1.5 (38.1)	24	32	1,536	48	24,576 (2,283 sq. m)
	2.5 - 4.5 (64.0 - 114.3)	QQ	3.5 (89.0)	56	12	576	48	9,216 (856 sq. m)
	1.0 - 3.0 (25.4 - 76.2)	XX	2.0 (51.0)	32	22	1,056	48	16,896 (1,570 sq. m)

** Availability for these tapered panel systems may vary for each region.

†† 4' x 8' tapered panels are made upon special request at all Siplast Polyiso Manufacturing facilities in all Paratherm® products. Certain run minimums will apply.

The piece count per bundle remains the same as in a 4' x 4' bundle. The boards per truck and bundles per truck would be half the numbers reflected above.