


PARASOLO® TPX COATED METAL SHEETS

Commercial Product Data Sheet

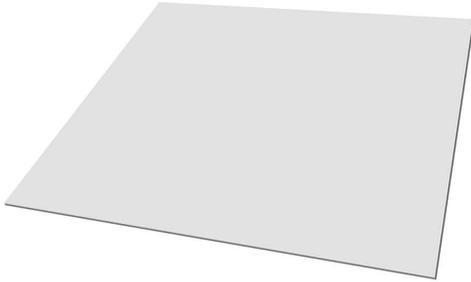

Parasolo® TPX Coated Metal Sheets are comprised of TPX membrane laminated to flat sheet metal stock to facilitate the adhesion of Parasolo TPX Membranes and accessories. Standard product utilizes 24. ga. galvanized steel, with 20 ga. galvanized steel, 0.040 aluminum and 24 ga. stainless steel as options available on a special-made-to-order basis.

Contact Siplast for information on approved product uses.

USES:
PARASOLO TPX ACCESSORY

Color	White
Dimensions	4 ft x 10 ft (1.21 m x 3.05 m)
TPX Coating Thickness (nom.)	25 mils (0.64 mm)
Metal Types	24 ga. Galvanized Steel 20 ga. Galvanized Steel 0.040 Aluminum 24 ga. Stainless Steel
Weight Per Sheet	24 ga. Galvanized Steel: 40 lb (18.14 kg) 20 ga. Galvanized Steel: 60 lb (27.22 kg) 0.040 Aluminum: 23 lb (10.43 kg) 24 ga. Stainless Steel: 40 lb (18.14 kg)

PRODUCT INFORMATION

Application

Refer to the applicable Siplast Technical Guide and applicable Siplast details for information on the fabrication and installation of metal components.



Storage and Handling

All Siplast roofing products should be stored on a clean, flat surface. All roofing products should be stored in a dry place out of direct exposure to the elements. Material should be handled so that it remains dry prior to and during installation.

See product packaging and the Safety Data Sheet for specific information on the safe handling of this product.

Packaging

Pallet: 49 in x 121 in (124 cm x 307 cm)
 Sheets Per Pallet: 5, 10, 30
 Weight Per Pallet: 24 ga. Galv: 435 lb (197.3 kg)
 20 ga. Galv: 530 lb (240.4 kg)
 0.040 Aluminum: 355 lb (152 kg)
 24 ga. Stainless Steel: 435 lb (197.3 kg)