

Paratherm® G Polyiso Insulation

Flat Polyiso with GRF Facers

Description:

Paratherm® G Polyiso Insulation is made of glass fiber reinforced cellulosic facers (GRF) bonded to a core of polyisocyanurate foam.


Paratherm® G Polyiso Insulation offers high thermal performance for modified bitumen and thermoplastic commercial roofing applications.

Features and Benefits:

- Approved for direct application to steel decks
- Higher R-value per inch than other insulations such as EPS, XPS and Mineral Wool
- Easy to install — lightweight, easy to cut, easy to handle

System Approvals:

- Approved component in commercial roof systems, mechanically attached and adhered
- Refer to the applicable Siplast Technical Guide for detailed application information




Codes & Compliance:

- Meets the requirements of ASTM C1289 Type II, Class 1, Grade 2 (20 psi) and also available in Grade 3 (25 psi)
- FM Approved — consult RoofNav.com for specific assemblies
- Classified by UL in accordance with ANSI/UL 1256, 790 and 263. Refer to UL Product iQ for specific assemblies
- Miami-Dade County Product Control Approved
- State of Florida Approved
- Meets the requirements of CAN/ULC 704.1, Type 2, Class 3 or Type 3, Class 3[†]
- UL (Canada) Evaluation Report ULC ER 1306[‡]



[‡] Manufacturing locations in UT and PA.

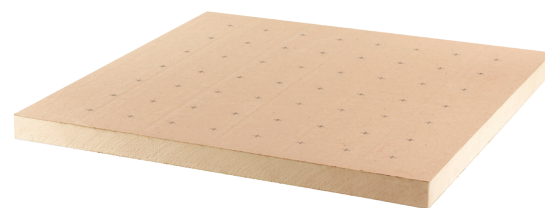

Panel Characteristics:

- Available in a variety of thicknesses from 1" (25.4 mm) to 4.6" (116 mm)
- Available in 4' x 4' (1.22 m x 1.22 m) and 4' x 8' (1.22 m x 2.44 m) boards

Paratherm® G Polyiso Insulation Thermal Values:

Size*	R-Value [†]	Max Flute Span (in)
1.0" (25.4 mm)	5.7	2 5/8" (66.7 mm)
1.2" (30.5 mm)	6.8	2 5/8" (66.7 mm)
1.5" (38.1 mm)	8.6	4 3/8" (111 mm)
1.75" (44.5 mm)	10.0	4 3/8" (111 mm)
2.0" (51 mm)	11.4	4 3/8" (111 mm)
2.2" (59 mm)	12.6	4 3/8" (111 mm)
2.3" (58 mm)	13.2	4 3/8" (111 mm)
2.5" (64 mm)	14.4	4 3/8" (111 mm)
2.6" (66 mm)	15.0	4 3/8" (111 mm)
2.8" (71 mm)	16.2	4 3/8" (111 mm)
3.0" (76 mm)	17.4	4 3/8" (111 mm)
3.2" (81 mm)	18.6	4 3/8" (111 mm)
3.5" (89 mm)	20.5	4 3/8" (111 mm)
3.7" (94 mm)	21.7	4 3/8" (111 mm)
4.0" (102 mm)	23.6	4 3/8" (111 mm)
4.3" (109 mm)	25.4	4 3/8" (111 mm)
4.5" (114 mm)	26.6	4 3/8" (111 mm)
4.6" (117 mm)	27.1	4 3/8" (111 mm)
4.6" (116 mm)	27.1	4 3/8" (111 mm)

* Other thicknesses available upon request.

[†] Long Term Thermal Resistance Values provide a 15-year time weighted average in accordance with CAN/ULC 770.

For optimal roof performance and to prevent thermal bridging Siplast recommends installing multiple layers of Polyiso with staggered joints.

Paratherm® G Polyiso Insulation

Flat Polyiso with GRF Facers

Sustainability:

- Manufactured with EPA-compliant blowing agents containing no CFCs or HCFCs; has zero ozone depletion potential (ODP) and negligible global warming potential (GWP)
- GREENGUARD Gold
- Green Circle Certified for recycled content
- Potential LEED Credits for Polyiso Use
- Health Product Declaration (HPD)
- Environmental Product Declaration (EPD)



Typical Physical Property Data:

Property	Test Method	Value
Compressive Strength	ASTM D1621	Grade 2 – 20 psi min (138 kPa) Grade 3 – 25 psi min (172 kPa)
Dimensional Stability Change (length + width)**	ASTM D2126	< 2% linear change
Flexural Strength	ASTM C203	40 psi min (275 kPa)
Tensile Strength	ASTM C209	500 psf min (24 kPa)
Water Absorption (percent by volume)	ASTM C209	1.5% max
Water Vapor Permeance	ASTM E96, Procedure A	1.5 perm max (85.8 ng/Pa•s•m²)
Service Temperature		-100° F to 250° F (-73.3° C to 121.1° C)
Flame Spread Index **	ASTM E84	< 75 [§]
Smoke Developed Index	ASTM E84	< 200 [§]

[§] Foam Core

** Stated dimensional stability tolerance: thickness shall not diminish by more than 4% max.

**These numerical ratings are not intended to reflect hazards presented by these or any other material under actual fire conditions.

Warnings and Limitations:

- Paratherm® G Polyiso Insulation is a non-structural, non load-bearing material. It is not designed for direct traffic usage unless adequately protected.
- As unprotected polyisocyanurate will burn, fire safety precautions should be observed wherever insulation products are used.
- Direct torching of modified bitumen roofing to Paratherm® G Polyiso Insulation will present a fire hazard. A properly installed ply sheet or approved cover board MUST be used over the insulation.
- Refer to the application specifications in the current membrane manufacturer's application and specifications manual for proper installation procedures.
- Material delivery should be carefully coordinated with the schedule for roofing operations to minimize job site storage time. Upon delivery, remove the factory packaging or slit on all four sides and cover pallets with a breathable, waterproof covering to allow for ventilation and to prevent the accumulation of condensation. Whenever possible, store pallets over finished surfaces rather than on dirt or grass to avoid upward transpiration conditions when the Paratherm® G Polyiso Insulation is to be stored for more than 14 days prior to installation.