
ANGLED PENETRATION WITH PARAPRO/PARAFLEX 531 LIQUID FLASHING

LEGEND
HEAT WELD
SEALANT

PARASOLO FLEECE BACK MEMBRANE - INSULCEL LIGHTWEIGHT INSULATING CONCRETE

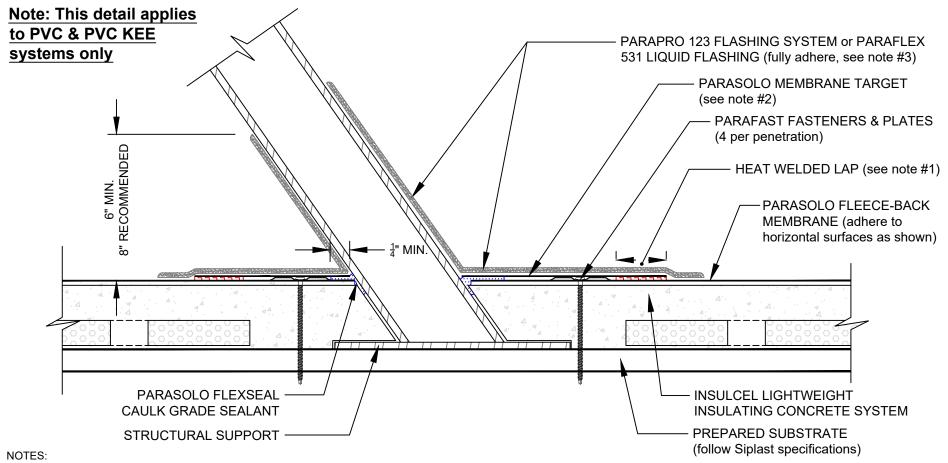

- FOR HEAT-WELDING LAPS USE 1" MINIMUM TO 1-1/2" MAXIMUM WELD.
- PARASOLO PVC KEE MEMBRANE IS REQUIRED AT LOCATIONS TO RECEIVE PARAFLEX 531 LIQUID FLASHING SYSTEMS.
- 3. REFER TO SIPLAST PREPARATION GUIDELINES FOR PROPER SURFACE TREATMENT OF ALL MATERIALS PRIOR TO APPLICATION OF PARAPRO OR PARAFLEX 531 LIQUID FLASHING MATERIALS.
- 4. PENETRATIONS TO RECEIVE THE PARAPRO 123 FLASHING SYSTEM OR PARAFLEX 531 LIQUID FLASHING MUST BE SECURED TO THE STRUCTURE TO PREVENT MOVEMENT.
- REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

Scale: NTS

REF: ANGLED PENETRATION - PARASOLO - INSULCEL - PPRO-PFLEX

Detail Number: DE-6819

siplast

14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254 (800) 922-8800

Rev: 06.15.2023