


DYNAMIC CRACK

TERAPRO 220/250 SURFACING SYSTEM - CONCRETE SUBSTRATE

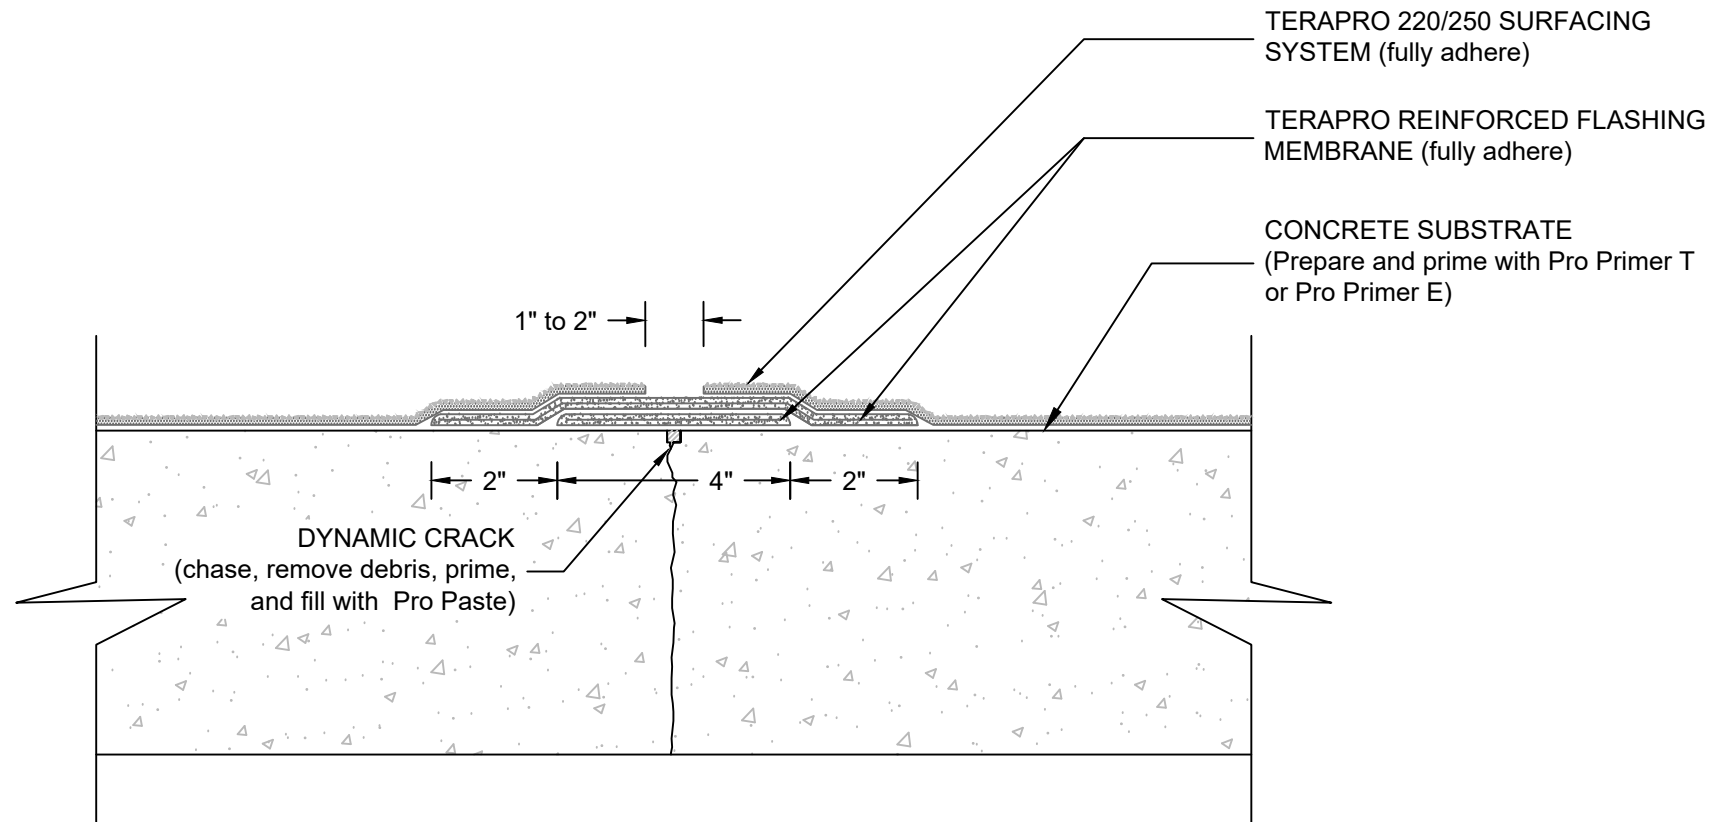

NOTES:

1. REFER TO SIPLAST PREPARATION GUIDELINES FOR PROPER SURFACE TREATMENT OF ALL MATERIALS PRIOR TO APPLICATION OF TERAPRO SURFACING MATERIALS.
2. SIPLAST RECOMMENDATIONS FOR PREPARATION AND TREATMENT OF DYNAMIC CRACKS ARE OFFERED ON A BEST-EFFORT BASIS AND ARE NOT A GUARANTEE THAT UNDERLYING CRACKS HAVING A WIDTH IN EXCESS OF 1/16-INCH WILL NOT ADVERSELY AFFECT THE PERFORMANCE OF THE TERAPRO SYSTEM. HOLDING BACK SURFACING RESIN IN A 1" TO 2"-INCH BAND CENTERED OVER THE CRACK WILL MINIMIZE THE POTENTIAL FOR CRACKING OF SURFACING COMPONENTS.
3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN TERAPRO 220/250 SURFACING SYSTEM SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

N.T.S