
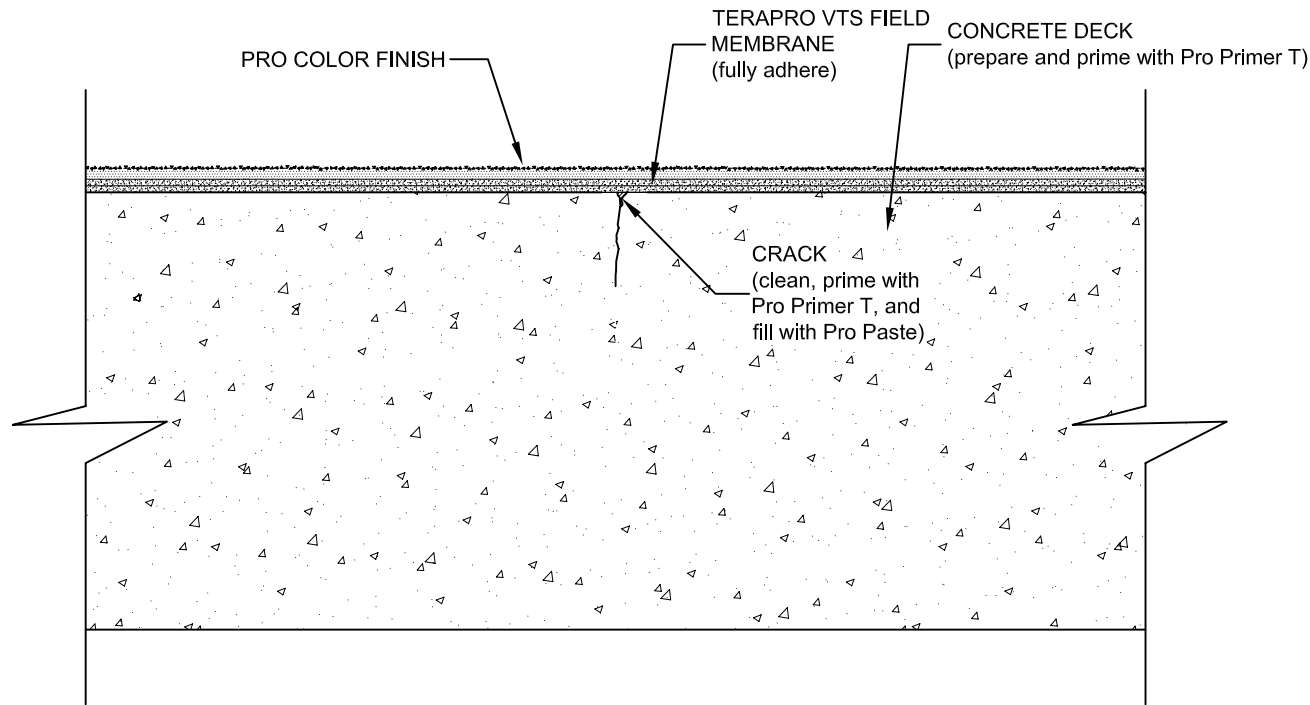


# CONCRETE STATIC CRACK - NON MOVING

## TERAPRO VTS REINFORCED - CONCRETE SUBSTRATE

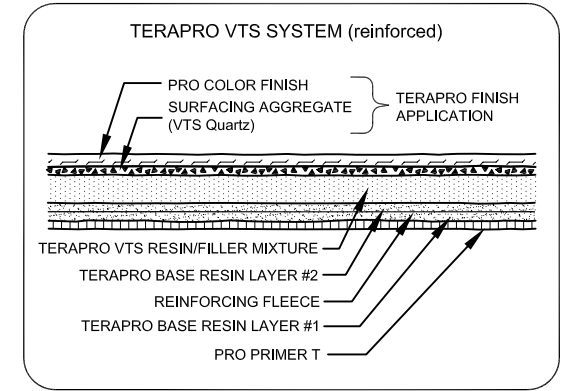

- NOTES:
1. REFER TO SIPLAST PREPARATION GUIDELINES FOR PROPER SURFACE TREATMENT OF ALL MATERIALS PRIOR TO APPLICATION OVER THE CRACK OF TERAPRO MATERIAL.
  2. IF THERE IS ANY DOUBT AS TO THE DYNAMIC NATURE OF THE CRACK, A 6" BAND OF RESIN/FLEECE/RESIN IS RECOMMENDED BEFORE FIELD MEMBRANE APPLICATION.
  3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN TERAPRO VTS INSTALLATION SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

N.T.S.