


TERANAP PLAZA DECK

PROTECTION COURSE/PEDESTAL/PAVER SYSTEM

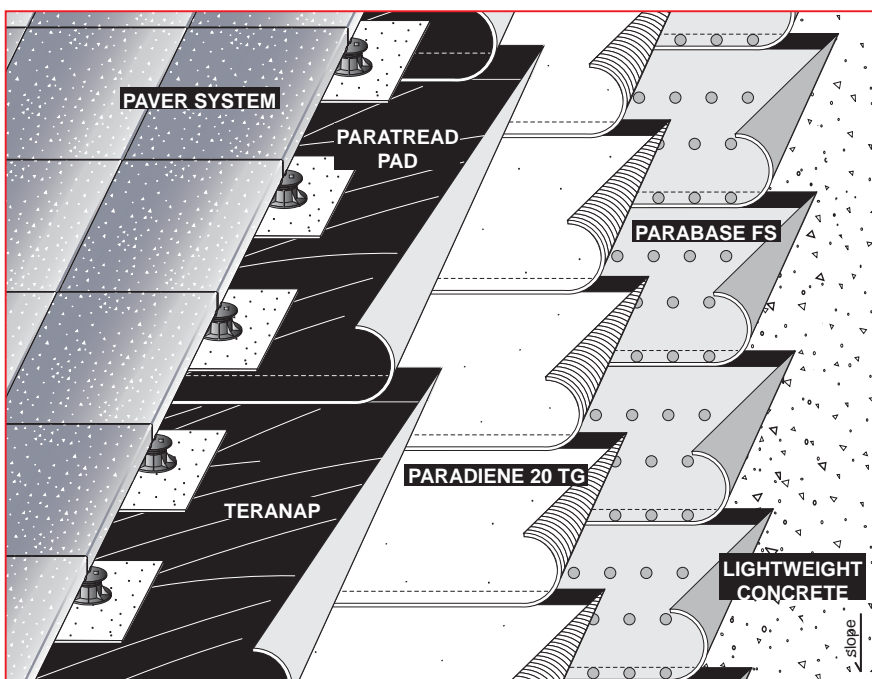

SLOPE 0" - 1/2" per ft*

MATERIALS per 100 sq ft

PARABASE FS	20 lb
PARADIENE 20 TG	76 lb
TERANAP	107 lb
PARATREAD	
PEDESTAL	
PAVER SYSTEM	

* Contact Siplast for higher slope requirements.

n.t.s.

Requirements and recommendations detailed in the Siplast catalog and Siplast long form specifications shall apply in addition to the following recommendations and specifications.

Application

1. Lay one ply of Parabase FS dry over the entire area to be roofed. Lap each sheet 3 inches over the underlying sheet and lap ends 6 inches. Using the approved fasteners, nail each sheet every 7 1/2 inches through the laps and stagger nail the remainder of the sheet in two rows on nominal 12 inch centers with fasteners in each row on 10 inch centers.
2. Beginning at the low point of the roof, fully torch one ply of Paradiene 20 TG to the base sheet, lapping both sides and ends a minimum of 3 inches. Offset end laps a minimum of 3 feet.
3. Beginning again at the low point of the roof, fully torch one ply of Teranap to the Paradiene 20 TG surface, lapping sides and ends a minimum of 6 inches. Offset end laps a minimum of 3 feet. Stagger laps between plies.
4. Install the approved Paratread protection pads cut to match the pedestal footprint and placed under each pedestal.
5. Ballast the system with an approved pedestal paver system according to the paver manufacturer's specifications and recommendations.

Note: Teranap is manufactured in both 1 meter and 2 meter widths. The Teranap weight shown above is a minimum weight for standard 2 meter wide Teranap. Contact Siplast for weights on other Teranap finish plies.

Caution: Siplast recommends that all practices pertaining to NRCA CERTA guidelines be followed when torching methods are employed. This includes performing a fire watch following any torch applications. Always have approved fire-extinguishing equipment nearby.

Ref. #: P20-tg Tnap LWC-base P-tread Paver-ped
Date: 10.13.11