


TERAPRO 250 RESIN/AGGREGATE - UNREINFORCED SURFACING SYSTEM

SUBSTRATE: CONCRETE

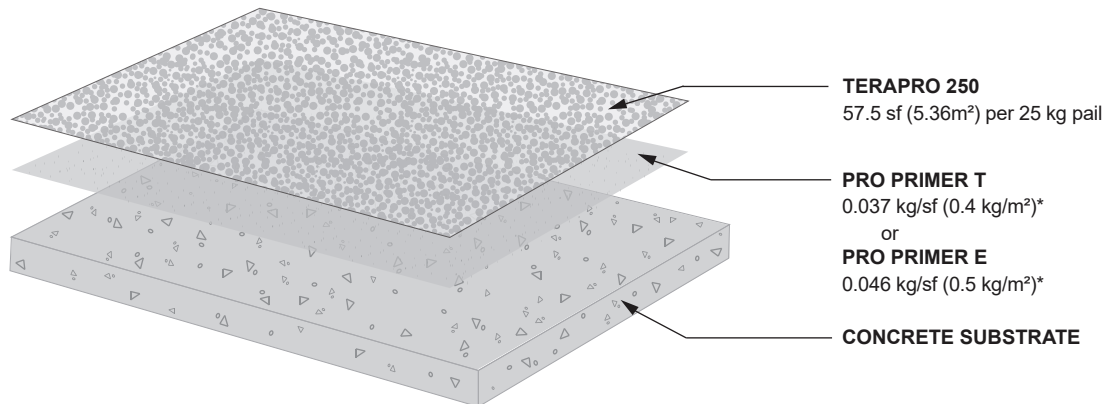

* Minimum application rates.

n.t.s.

Requirements and recommendations detailed in the Siplast catalog and PMMA Surfacing System Installers Guide shall apply in addition to the following recommendations and specifications.

Preparation & Application

1. Qualify the concrete substrate in accordance with Siplast specifications and mechanically prepare to a CSP 2 to CSP 4 profile.
2. Prime the prepared concrete substrate using catalyzed Pro Primer T or Pro Primer E. Allow Pro Primer T to cure for a minimum of 45 minutes. Allow Pro Primer E to cure for a minimum of 12 hours and overlay with the following surface layer within 48 hours. Pro Primer E must be used when relative humidity (RH) of the concrete substrate is 75% or greater.
3. Apply catalyzed Terapro 250 Resin evenly over the previously applied primer layer using a squeegee. Immediately following the application of the Terapro 250 Resin and while the resin is wet, backroll the resin using a conventional nap roller to smooth and level the surface. Allow the Terapro 250 Resin to cure for 2 hours.

Ref #: Terapro 250 - Concrete
Rev: 04.02.2022