


STATIC CRACK (NON-MOVING)

TERAPRO 220/250 SURFACING SYSTEM - CONCRETE SUBSTRATE

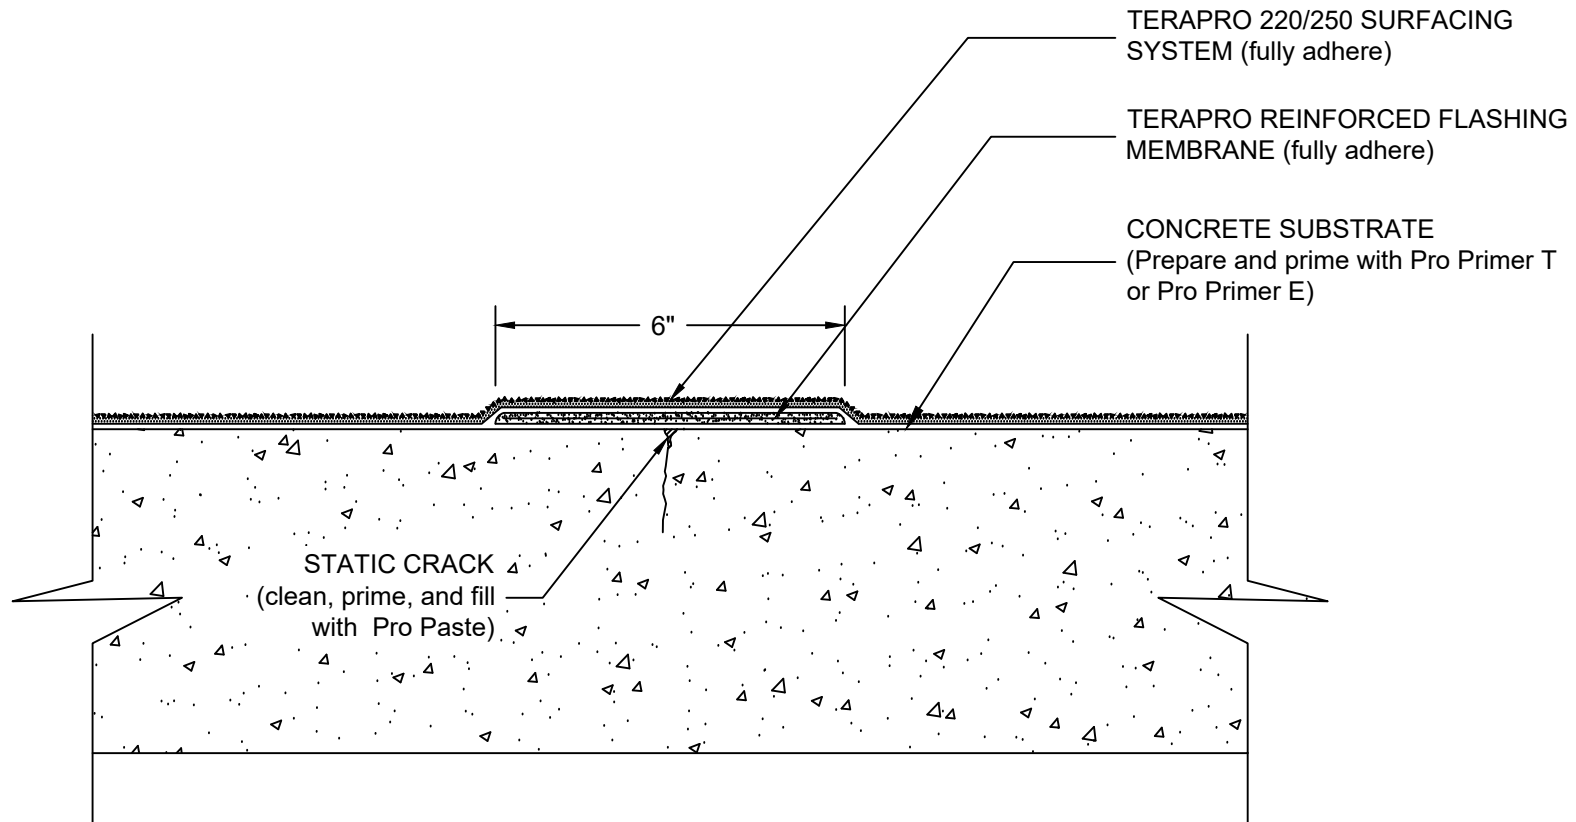

NOTES:

1. REFER TO SIPLAST PREPARATION GUIDELINES FOR PROPER SURFACE TREATMENT OF ALL MATERIALS PRIOR TO APPLICATION OF TERAPRO SURFACING MATERIALS.
2. IF THERE IS ANY DOUBT AS TO THE DYNAMIC NATURE OF THE CRACK, THE USE OF AN ADDITIONAL 6" AND 12" BAND OF RESIN/FLEECE/RESIN IS RECOMMENDED.
3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN TERAPRO 220/250 SURFACING SYSTEM SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

N.T.S