



OUTSIDE CORNER REINFORCEMENT - UNIVERSAL CORNER DETAIL

PARASOLO ROOF MEMBRANE - INSULATED (ALL SYSTEMS)


LEGEND



HEAT WELD

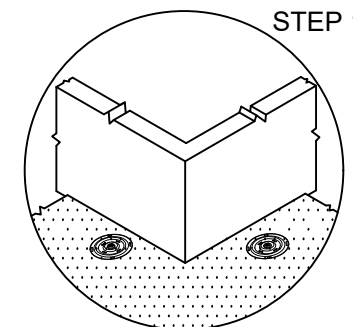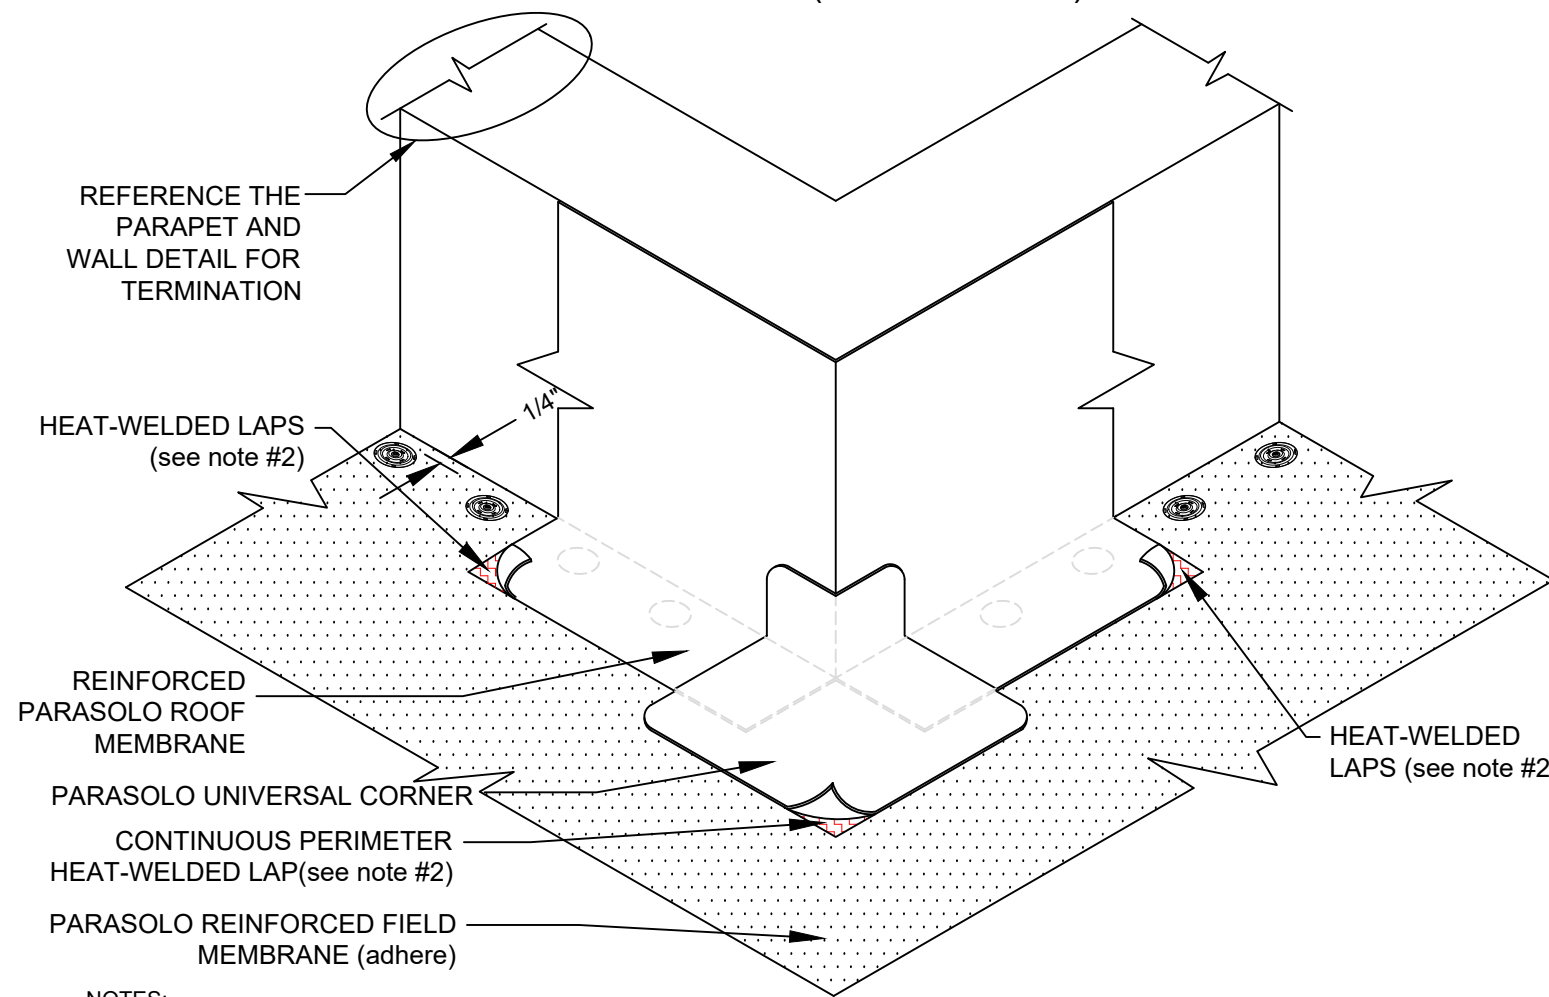

STEP 1

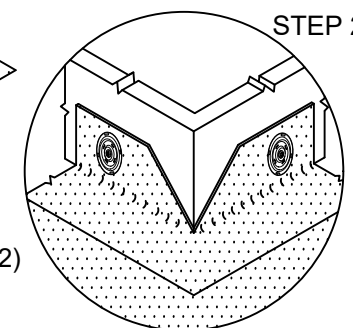

STEP 2

ALTERNATE
MEMBRANE ATTACHMENT

NOTES:

1. CORNERS MAY ALSO BE FIELD-FABRICATED USING UNREINFORCED SMOOTH MEMBRANE.
2. FOR HEAT-WELDING LAPS USE 1" MINIMUM WELD TO 1.5" MAXIMUM WELD.
3. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.
4. PARASOLO BONDING ADHESIVE CAN BE USED UP TO A MAXIMUM FLASHING HEIGHT OF 54 INCHES. ADDITIONAL TERMINATION IS REQUIRED FOR FLASHING HEIGHTS ABOVE 54 INCHES WHEN PARASOLO BONDING ADHESIVE IS USED. CONTACT THE SIPLAST TECHNICAL DEPARTMENT FOR ADDITIONAL INFORMATION.

Scale: NTS

REF: OUTSIDE CORNER REINFORCEMENT - UNIVERSAL CORNER - PARASOLO - INSULATED

Detail Number:
DE-SP-36-15e



14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254 (800) 922-8800

www.siplast.com

Rev: 06.08.2023