
TERMINATION DETAILS 1-4

PARASOLO ROOF MEMBRANE - INSULATED (ALL SYSTEMS)

LEGEND SEALANT



PARASOLO FLEXSEAL CAULK GRADE SEALANT


COUNTER FLASHING (compression fit)

PARASOLO FLEXSEAL CAULK GRADE SEALANT


PARASOLO WATER-BLOCK SEALANT

PARAFAST LIP TERMINATION BAR (fastened 8 inches o.c.)


PARASOLO SMOOTH REINFORCED MEMBRANE (adhered with Parasolo Bonding Adhesive or Parasolo Quick Spray Adhesive, see note #2)

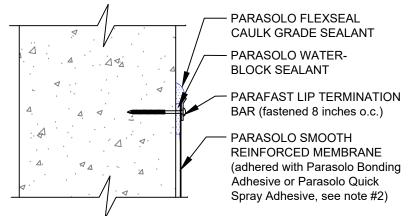

1. REGLET COUNTER FLASHING TERMINATION

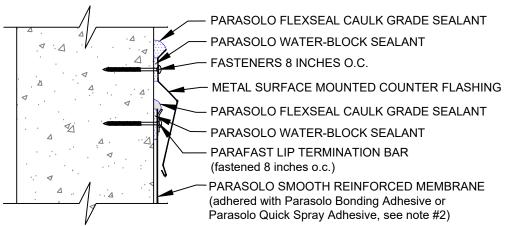

3. MECHANICAL TERMINATION

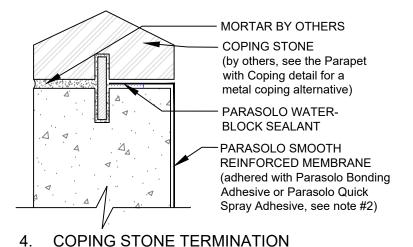

. SURFACE MOUNTED COUNTER FLASHING TERMINATION

THE PROPERTY OF THE PROPERTY O

NOTES:

- 1. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.
- 2. PARASOLO BONDING ADHESIVE CAN BE USED UP TO A MAXIMUM FLASHING HEIGHT OF 54 INCHES. ADDITIONAL TERMINATION IS REQUIRED FOR FLASHING HEIGHTS ABOVE 54 INCHES WHEN PARASOLO BONDING ADHESIVE IS USED. CONTACT THE SIPLAST TECHNICAL DEPARTMENT FOR ADDITIONAL INFORMATION.

Scale: NTS

REF: TERMINATION DETAILS 1-4 - PARASOLO - INSULATED

Detail Number: DE-SP-38-05m

siplast

14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254 (800) 922-8800

www.siplast.com

Rev: 06.08.2023