

A Surfacing Layer for Vehicular Applications

Terapro™ 250

Fast-Curing PMMA Waterproofing and Concrete Protection

Liquid-applied, pigmented PMMA resin/aggregate blend is used as vehicular surface protection with anti-skid* properties.

* Tested in accordance with ASTM E303.

Terapro™ 250





Description:

Terapro 250 is a surfacing layer used for vehicular applications. It provides PMMA waterproofing performance and added concrete protection for parking decks and ramps, and other vehicular areas over unoccupied space. Its PMMA properties allow it to achieve both a bond to the substrate and an interlaminar bond. This tenacious adhesion results in improved resistance to disbonding under the loads imposed by heavy vehicular traffic.

Terapro 250's bond strength, together with the tough crystal quartz surfacing, offers exceptional durability. The completed high-mil thickness application is monolithic and seamless.

The liquid-applied, layered application consists of one coat of primer, a filled waterproofing layer, a hard-wearing quartz surfacing, and a durable pigmented finish layer. Reinforced systems for use over occupied interior spaces include a Terapro polyester fleece fabric reinforced system for additional protection. Each layer of the system consists of a catalyzed PMMA resin.

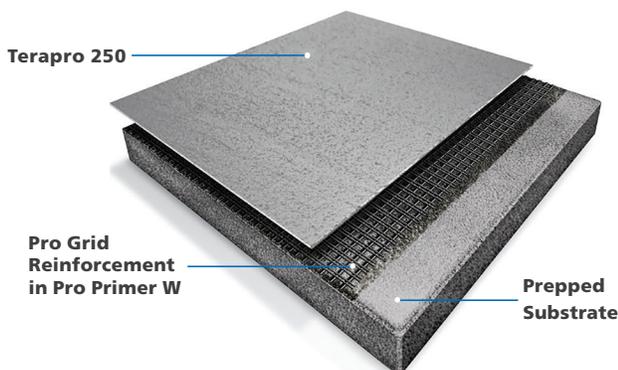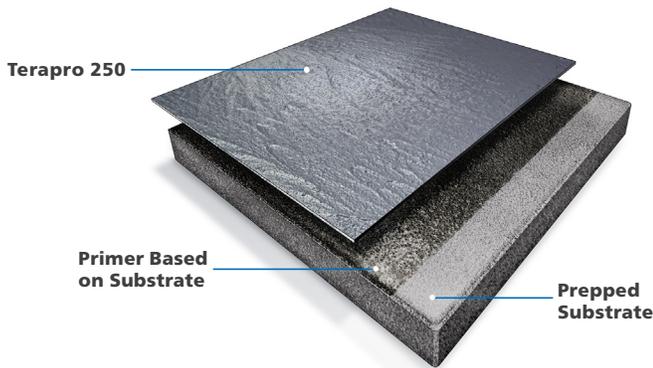

Advantages:

- Fast-curing — ready for traffic in approximately 2 hours[†] when installed properly
- Provides protection against typical vehicular fluids[‡]
- Tested in accordance with ASTM E303 to provide skid resistance
- UV stable
- Can be applied in temperatures as low as 32°F
- Available in multiple colors
- Aggregate, color, and resin in one package allows you to catalyze, mix, and go

[†] Ambient and substrate temperatures affect the application of Terapro 250. Refer to Terapro 250 Traffic Surfacing System Installation Guide for ambient and substrate temperature guidelines and restrictions.

[‡] Siplast warranties and guarantees do not provide coverage against traffic, physical damage/impact/abuse or exposure to chemicals and other environmental contaminants. Refer to siplast.com for more information on warranty and guarantee coverage and restrictions.

Suitable for:

- Parking decks and ramps over unoccupied space
- Vehicular areas over unoccupied space
- Pedestrian walkways

Related Accessories



Pro Primer T or W
depending in system



Pro Catalyst

Contact a Siplast representative to request a sample.



With you every step of the way