

ParaGREEN™ Wind Uplift Mat

Commercial Product Data Sheet



With you every step of the way

Description:

ParaGREEN™ Wind Uplift Mat, in conjunction with ParaGREEN™ Wind Anchors, are designed to provide greater wind resistance for ParaGREEN™ Vegetated Roof Assemblies. ParaGREEN™ Wind Uplift Mat is comprised of polypropylene and contains 0.5% carbon black for enhanced UV resistance.


Contact Siplast for additional information on approved product uses.

Uses:

Vegetated Assemblies Wind Uplift

Material	Multifilament Polyester Yarns Coated with PVC
Tensile Ultimate Strength	2,025 lb./ft. (ASTM D6637)
Tensile Creep Limited Strength	1,341 lb./ft. (ASTM D5262)
Long Term Design Strength	1,161 lb./ft. (NCMA 97)
Aperture Size (Measured)	1 in. x 7/8 in.
Roll Size	6.5 ft. x 150 ft.

LEED Information	
Recycled Content (% by weight)	Manufacture Location
0%	Murfreesboro, TN

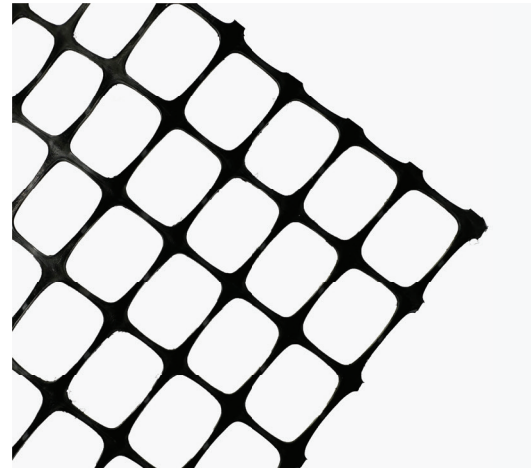

Storage and Handling:

All Siplast ParaGREEN™ products should be stored horizontally on a clean, flat surface.

See product packaging for specific information on the safe handling of this product.

Packaging:

- Shipping Size per Roll: 78 in. x 16 in. x 16 in.
- Weight per Roll: 56 lb.