



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

SECTION 1: IDENTIFICATION

Product Identifier

Product Form: Mixture

Product Name: Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White); Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Paracoat (Sand, Gray, White); Paracoat HS

Intended Use of the Product

Use of the Substance/Mixture: Liquid Resin Roofing & Waterproofing Systems. For professional use only.

Name, Address, and Telephone of the Responsible Party

Company

Siplast, Inc.
14911 Quorum Drive, Ste. 600
Dallas, TX 75254
T 800-922-8800
www.siplast.com

Manufacturer

Siplast, Inc.
35 McClellan Blvd
Arkadelphia, AR 71923
T 870-246-9000

Emergency Telephone Number

Emergency Number : 800-424-9300 (CHEMTREC)

SECTION 2: HAZARDS IDENTIFICATION

Classification of the Substance or Mixture

Classification (GHS-US)

| | |
|---------------------|------|
| Flam. Liq. 2 | H225 |
| Acute Tox. 4 (Oral) | H302 |
| Skin Irrit. 2 | H315 |
| Eye Irrit. 2A | H319 |
| Resp. Sens. 1 | H334 |
| Skin Sens. 1 | H317 |
| Muta. 1B | H340 |
| Carc. 1B | H350 |
| Carc. 2 | H351 |
| STOT SE 3 | H335 |
| STOT SE 3 | H336 |
| Aquatic Acute 3 | H402 |
| Aquatic Chronic 3 | H412 |

Label Elements

GHS-US Labeling

Hazard Pictograms (GHS-US)



Signal Word (GHS-US)

Hazard Statements (GHS-US)

- : Danger
- : H225 - Highly flammable liquid and vapor.
H302 - Harmful if swallowed.
H315 - Causes skin irritation.
H317 - May cause an allergic skin reaction.
H319 - Causes serious eye irritation.
H334 - May cause allergy or asthma symptoms or breathing difficulties if inhaled.
H335 - May cause respiratory irritation.
H336 - May cause drowsiness or dizziness.
H340 - May cause genetic defects.



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

- H350 - May cause cancer.
H351 - Suspected of causing cancer
H360 - May damage fertility or the unborn child.
H402 - Harmful to aquatic life.
H412 - Harmful to aquatic life with long lasting effects.
- Precautionary Statements (GHS-US) :** P201 - Obtain special instructions before use.
P202 - Do not handle until all safety precautions have been read and understood.
P210 - Keep away from heat, sparks, open flames, hot surfaces. - No smoking.
P233 - Keep container tightly closed.
P240 - Ground/bond container and receiving equipment.
P241 - Use explosion-proof electrical, ventilating, and lighting equipment.
P242 - Use only non-sparking tools.
P243 - Take precautionary measures against static discharge.
P260 - Do not breathe vapors, mist, spray.
P264 - Wash hands, forearms, and other exposed areas thoroughly after handling.
P270 - Do not eat, drink or smoke when using this product.
P271 - Use only outdoors or in a well-ventilated area.
P272 - Contaminated work clothing must not be allowed out of the workplace.
P273 - Avoid release to the environment.
P280 - Wear protective gloves, protective clothing, eye protection, face protection, respiratory protection.
P284 - [In case of inadequate ventilation] wear respiratory protection.
P301+P312 - If swallowed: Call a poison center/doctor if you feel unwell.
P302+P352 - If on skin: Wash with plenty of water.
P303+P361+P353 - If on skin (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304+P340 - IF INHALED: Remove person to fresh air and keep at rest in a position comfortable for breathing.
P305+P351+P338 - IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P308+P313 - If exposed or concerned: Get medical advice/attention.
P321 - Specific treatment (see section 4).
P330 - Rinse mouth.
P333+P313 - If skin irritation or rash occurs: Get medical advice/attention.
P337+P313 - If eye irritation persists: Get medical advice/attention.
P342+P311 - If experiencing respiratory symptoms: Call a poison center/doctor.
P362+P364 - Take off contaminated clothing and wash it before reuse.
P370+P378 - In case of fire: Use appropriate media to extinguish.
P403+P233+ P235 - Store in a well-ventilated place. Keep container tightly closed. Keep cool.
P405 - Store locked up.
P501 - Dispose of contents/container in accordance with local, regional, national, territorial, provincial, and international regulations.

Other Hazards

Exposure may aggravate those with pre-existing eye, skin, or respiratory conditions. Flammable vapors can accumulate in head space of closed systems.

Unknown Acute Toxicity (GHS-US) Not available

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

Mixture

| Name | Product Identifier | % (w/w) | Classification (GHS-US) |
|---------------------|--------------------|---------|-------------------------------------------|
| Methyl methacrylate | (CAS No) 80-62-6 | 15 - 40 | Flam. Liq. 2, H225 Skin Irrit. 2, H315 |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | | | |
|----------------------------------------------------------------------------------------------------------------------|----------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| | | | Eye Irrit. 2B, H320 Resp. Sens. 1, H334 Skin Sens. 1, H317 STOT SE 3, H335 Aquatic Acute 3, H402 |
| 2-Ethylhexyl acrylate | (CAS No) 103-11-7 | 10 - 30 | Flam. Liq. 4, H227 Skin Irrit. 2, H315 Eye Irrit. 2A, H319 Skin Sens. 1, H317 STOT SE 3, H336 Aquatic Acute 3, H402 Aquatic Chronic 3, H412 |
| Titanium dioxide | (CAS No) 13463-67-7 | 0 - 20 | Carc. 2, H351 |
| Quartz | (CAS No) 14808-60-7 | 0.1 – 2.0 | Carc. 1A, H350 STOT SE 3, H335 STOT RE 1, H372 |
| | | | |
| Naphtha, petroleum, hydrodesulfurized heavy | (CAS No) 64742-82-1 | 0 – 0.5 | Flam. Liq. 1, H224 Skin Irrit. 2, H315 Muta. 1B, H340 Carc. 1B, H350 Repr. 2, H361 STOT SE 3, H336 Asp. Tox. 1, H304 Aquatic Chronic 2, H411 |
| Fatty acids, C18, unsaturated, dimers, reaction products with N,N-dimethyl-1,3-propanediamine and 1,3-propanediamine | (CAS No) 162627-17-0 | 0 – 0.5 | Skin Sens. 1, H317 |
| Solvent naphtha, petroleum, light aromatic | (CAS No) 64742-95-6 | 0 – 0.5 | Flam. Liq. 1, H224 Skin Irrit. 2, H315 Muta. 1B, H340 Carc. 1B, H350 Repr. 2, H361 STOT SE 3, H336 Asp. Tox. 1, H304 Aquatic Acute 2, H401 Aquatic Chronic 2, H411 |

Multiple WHMIS ranges have been utilized due to varying composition.

Full text of H-phrases: see section 16

SECTION 4: FIRST AID MEASURES

Description of First Aid Measures

General: Never give anything by mouth to an unconscious person. IF exposed or concerned: Get medical advice/attention.

Inhalation: When symptoms occur: go into open air and ventilate suspected area. Remove to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER/doctor/physician if you feel unwell.

Skin Contact: Remove contaminated clothing. Drench affected area with water for at least 15 minutes. Wash contaminated clothing before reuse. If skin irritation or rash occurs: Get medical advice/attention.



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

Eye Contact: Rinse cautiously with water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Obtain medical attention.

Ingestion: Rinse mouth. Do NOT induce vomiting. Seek medical attention.

Most Important Symptoms and Effects Both Acute and Delayed

General: Harmful if swallowed. Causes eye irritation. Skin irritation. May cause an allergic skin reaction. Irritation of respiratory tract. May damage fertility. May damage the unborn child. Inhalation may cause allergic respiratory reaction with asthma-like symptoms and difficulty breathing. Vapors may cause drowsiness and dizziness. May cause cancer. May cause heritable genetic damage.

Inhalation: May cause respiratory irritation. Exposure may produce an allergic reaction. May cause drowsiness or dizziness.

Skin Contact: Causes skin irritation. May cause an allergic skin reaction.

Eye Contact: Causes eye irritation.

Ingestion: Swallowing a small quantity of this material will result in serious health hazard.

Chronic Symptoms: May damage fertility. May damage the unborn child. May cause heritable genetic damage. May cause cancer.

Indication of Any Immediate Medical Attention and Special Treatment Needed

If exposed or concerned, get medical advice and attention.

SECTION 5: FIRE-FIGHTING MEASURES

Extinguishing Media

Suitable Extinguishing Media: Water spray, dry chemical, foam, carbon dioxide.

Unsuitable Extinguishing Media: Do not use a heavy water stream. Use of heavy stream of water may spread fire.

Special Hazards Arising From the Substance or Mixture

Fire Hazard: Highly flammable liquid and vapor.

Explosion Hazard: May form flammable/explosive vapor-air mixture.

Reactivity: Product may polymerize at 60°C (>140°F), causing an exothermic reaction which may cause container damage or fire. May react with peroxides, oxidizers, and incompatibilities.

Advice for Firefighters

Precautionary Measures Fire: Exercise caution when fighting any chemical fire.

Firefighting Instructions: Use water spray or fog for cooling exposed containers.

Protection During Firefighting: Do not enter fire area without proper protective equipment, including respiratory protection.

Hazardous Combustion Products: Carbon oxides (CO, CO₂). Nitrogen oxides. Hydrocarbons. Black smoke. Methyl methacrylate. Oxides of titanium. May release flammable gases. May liberate toxic gases.

Other Information: Do not allow run-off from firefighting to enter drains or water courses.

Reference to Other Sections

Refer to section 9 for flammability properties.

SECTION 6: ACCIDENTAL RELEASE MEASURES

Personal Precautions, Protective Equipment and Emergency Procedures

General Measures: Use special care to avoid static electric charges. Keep away from heat/sparks/open flames/hot surfaces. – No smoking. Avoid all eye and skin contact and do not breathe vapor and mist. Do not allow product to spread into the environment. Handle in accordance with good industrial hygiene and safety practice.

For Non-Emergency Personnel

Protective Equipment: Use appropriate personal protection equipment (PPE).

Emergency Procedures: Evacuate unnecessary personnel.

For Emergency Personnel

Protective Equipment: Equip cleanup crew with proper protection. Use appropriate personal protection equipment (PPE).

Emergency Procedures: Ventilate area.

Environmental Precautions

Prevent entry to sewers and public waters. Avoid release to the environment.

Methods and Material for Containment and Cleaning Up

For Containment: Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams.



Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White); Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

Methods for Cleaning Up: Clear up spills immediately and dispose of waste safely. Absorb and/or contain spill with inert material, then place in suitable container. Do not take up in combustible material such as: saw dust or cellulosic material. Contact competent authorities after a spill. Use only non-sparking tools.

Reference to Other Sections

See heading 8, Exposure Controls and Personal Protection.

SECTION 7: HANDLING AND STORAGE

Precautions for Safe Handling

Additional Hazards When Processed: Handle empty containers with care because residual vapors are flammable. Product may polymerize at 60°C (>140°F), causing an exothermic reaction which may cause container damage or fire. May react with peroxides, oxidizers, and incompatibilities. When heated to decomposition, emits toxic fumes.

Hygiene Measures: Handle in accordance with good industrial hygiene and safety procedures. Wash hands and other exposed areas with mild soap and water before eating, drinking, or smoking and again when leaving work. Contaminated work clothing should not be allowed out of the workplace. Wash contaminated clothing before reuse. Do not eat, drink or smoke when using this product.

Conditions for Safe Storage, Including Any Incompatibilities

Technical Measures: Proper grounding procedures to avoid static electricity should be followed. Ground/bond container and receiving equipment. Use explosion-proof electrical, ventilating, and lighting equipment.

Storage Conditions: Store in a dry, cool and well-ventilated place. Keep container closed when not in use. Keep in fireproof place. Keep/Store away from extremely high or low temperatures, ignition sources, combustible materials, heat, direct sunlight, incompatible materials.

Incompatible Materials: Strong acids. Strong bases. Strong oxidizers.

Specific End Use(s)

Parapro Liquid Resin system. For professional use only.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Control Parameters

| Methyl methacrylate (80-62-6) | | |
|--------------------------------------|--------------------------------------|-----------------------|
| Mexico | OEL TWA (mg/m ³) | 410 mg/m ³ |
| Mexico | OEL TWA (ppm) | 100 ppm |
| Mexico | OEL STEL (mg/m ³) | 510 mg/m ³ |
| Mexico | OEL STEL (ppm) | 125 ppm |
| USA ACGIH | ACGIH TWA (ppm) | 50 ppm |
| USA ACGIH | ACGIH STEL (ppm) | 100 ppm |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 410 mg/m ³ |
| USA OSHA | OSHA PEL (TWA) (ppm) | 100 ppm |
| USA NIOSH | NIOSH REL (TWA) (mg/m ³) | 410 mg/m ³ |
| USA NIOSH | NIOSH REL (TWA) (ppm) | 100 ppm |
| USA IDLH | US IDLH (ppm) | 1000 ppm |
| Alberta | OEL STEL (mg/m ³) | 410 mg/m ³ |
| Alberta | OEL STEL (ppm) | 100 ppm |
| Alberta | OEL TWA (mg/m ³) | 205 mg/m ³ |
| Alberta | OEL TWA (ppm) | 50 ppm |
| British Columbia | OEL STEL (ppm) | 100 ppm |
| British Columbia | OEL TWA (ppm) | 50 ppm |
| Manitoba | OEL STEL (ppm) | 100 ppm |
| Manitoba | OEL TWA (ppm) | 50 ppm |
| New Brunswick | OEL TWA (mg/m ³) | 410 mg/m ³ |
| New Brunswick | OEL TWA (ppm) | 100 ppm |
| Newfoundland & Labrador | OEL STEL (ppm) | 100 ppm |
| Newfoundland & Labrador | OEL TWA (ppm) | 50 ppm |
| Nova Scotia | OEL STEL (ppm) | 100 ppm |
| Nova Scotia | OEL TWA (ppm) | 50 ppm |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | | |
|--------------------------------------|--------------------------------------|---------------------------------------------------------------------------|
| Nunavut | OEL STEL (mg/m ³) | 510 mg/m ³ |
| Nunavut | OEL STEL (ppm) | 125 ppm |
| Nunavut | OEL TWA (mg/m ³) | 410 mg/m ³ |
| Nunavut | OEL TWA (ppm) | 100 ppm |
| Northwest Territories | OEL STEL (mg/m ³) | 510 mg/m ³ |
| Northwest Territories | OEL STEL (ppm) | 125 ppm |
| Northwest Territories | OEL TWA (mg/m ³) | 410 mg/m ³ |
| Northwest Territories | OEL TWA (ppm) | 100 ppm |
| Ontario | OEL STEL (ppm) | 100 ppm |
| Ontario | OEL TWA (ppm) | 50 ppm |
| Prince Edward Island | OEL STEL (ppm) | 100 ppm |
| Prince Edward Island | OEL TWA (ppm) | 50 ppm |
| Québec | VEMP (mg/m ³) | 205 mg/m ³ |
| Québec | VEMP (ppm) | 50 ppm |
| Saskatchewan | OEL STEL (ppm) | 100 ppm |
| Saskatchewan | OEL TWA (ppm) | 50 ppm |
| Yukon | OEL STEL (mg/m ³) | 510 mg/m ³ |
| Yukon | OEL STEL (ppm) | 125 ppm |
| Yukon | OEL TWA (mg/m ³) | 410 mg/m ³ |
| Yukon | OEL TWA (ppm) | 100 ppm |
| Quartz (14808-60-7) | | |
| Mexico | OEL TWA (mg/m ³) | 0.1 mg/m ³ (respirable fraction) |
| USA ACGIH | ACGIH TWA (mg/m ³) | 0.025 mg/m ³ (respirable fraction) |
| USA OSHA | OSHA PEL (STEL) (mg/m ³) | 250 mppcf/%SiO ₂ +5, 10mg/m ³ /%SiO ₂ +2 |
| USA NIOSH | NIOSH REL (TWA) (mg/m ³) | 0.05 mg/m ³ (respirable dust) |
| USA IDLH | US IDLH (mg/m ³) | 50 mg/m ³ (respirable dust) |
| Alberta | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable particulate) |
| British Columbia | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable) |
| Manitoba | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable fraction) |
| New Brunswick | OEL TWA (mg/m ³) | 0.1 mg/m ³ (respirable fraction) |
| Newfoundland & Labrador | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable fraction) |
| Nova Scotia | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable fraction) |
| Nunavut | OEL TWA (mg/m ³) | 0.1 mg/m ³ (respirable mass) |
| Northwest Territories | OEL TWA (mg/m ³) | 0.1 mg/m ³ (respirable mass) |
| Ontario | OEL TWA (mg/m ³) | 0.10 mg/m ³ (designated substances regulation-respirable) |
| Prince Edward Island | OEL TWA (mg/m ³) | 0.025 mg/m ³ (respirable fraction) |
| Québec | VEMP (mg/m ³) | 0.1 mg/m ³ (respirable dust) |
| Saskatchewan | OEL TWA (mg/m ³) | 0.05 mg/m ³ (respirable fraction) |
| Yukon | OEL TWA (mg/m ³) | 300 particle/mL |
| Titanium dioxide (13463-67-7) | | |
| Mexico | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Mexico | OEL STEL (mg/m ³) | 20 mg/m ³ |
| USA ACGIH | ACGIH TWA (mg/m ³) | 10 mg/m ³ |
| USA OSHA | OSHA PEL (TWA) (mg/m ³) | 15 mg/m ³ (total dust) |
| USA IDLH | US IDLH (mg/m ³) | 5000 mg/m ³ |
| Alberta | OEL TWA (mg/m ³) | 10 mg/m ³ |
| British Columbia | OEL TWA (mg/m ³) | 10 mg/m ³ (total dust) |
| Manitoba | OEL TWA (mg/m ³) | 10 mg/m ³ |
| New Brunswick | OEL TWA (mg/m ³) | 10 mg/m ³ |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**


According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | | |
|-------------------------------|--------------------------------------|-------------------------------------------------------------------------------------|
| Newfoundland & Labrador | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Nova Scotia | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Nunavut | OEL TWA (mg/m ³) | 5 mg/m ³ (respirable mass) |
| Northwest Territories | OEL TWA (mg/m ³) | 5 mg/m ³ (respirable mass) |
| Ontario | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Prince Edward Island | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Québec | VEMP (mg/m ³) | 10 mg/m ³ (containing no Asbestos and <1% Crystalline silica-total dust) |
| Saskatchewan | OEL STEL (mg/m ³) | 20 mg/m ³ |
| Saskatchewan | OEL TWA (mg/m ³) | 10 mg/m ³ |
| Yukon | OEL STEL (mg/m ³) | 20 mg/m ³ |
| Yukon | OEL TWA (mg/m ³) | 30 mppcf |
| Silica, amorphous (7631-86-9) | | |
| USA NIOSH | NIOSH REL (TWA) (mg/m ³) | 6 mg/m ³ |
| USA IDLH | US IDLH (mg/m ³) | 3000 mg/m ³ |
| Nunavut | OEL TWA (mg/m ³) | 2 mg/m ³ (respirable mass) |
| Northwest Territories | OEL TWA (mg/m ³) | 2 mg/m ³ (respirable mass) |
| Yukon | OEL TWA (mg/m ³) | 300 particle/mL (as measured by Konimeter instrumentation) |

Exposure Controls

Appropriate Engineering Controls: Ensure all national/local regulations are observed. Gas detectors should be used when flammable gases/vapors may be released. Proper grounding procedures to avoid static electricity should be followed. Use explosion-proof equipment. Emergency eye wash fountains and safety showers should be available in the immediate vicinity of any potential exposure. Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment: Protective clothing. Gloves. Insufficient ventilation: wear respiratory protection. Protective goggles.

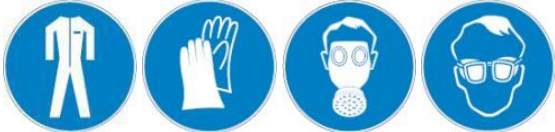

Materials for Protective Clothing: Chemically resistant materials and fabrics. Wear fire/flamm resistant/retardant clothing.

Hand Protection: Wear chemically resistant protective gloves.

Eye Protection: Chemical goggles or safety glasses.

Skin and Body Protection: Wear suitable protective clothing.

Respiratory Protection: Use NIOSH-approved air-purifying or supplied-air respirator where airborne concentrations of vapor or mist are expected to exceed exposure limits.

Thermal Hazard Protection: Wear suitable protective clothing.

Other Information: When using, do not eat, drink or smoke.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

Information on Basic Physical and Chemical Properties

| | |
|------------------|-------------------------------------------|
| Physical State | : Liquid |
| Appearance | : White, pebble gray, gray, beige |
| Odor | : Methyl methacrylate, Light Floral Scent |
| Odor Threshold | : Not available |
| pH | : Not available |
| Evaporation Rate | : Not available |
| Melting Point | : Not available |
| Freezing Point | : Not available |
| Boiling Point | : Not available |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | |
|---------------------------------------------------|-------------------------------------------------------------------------|
| Flash Point | : 10 °C (50.00 °F) |
| Auto-ignition Temperature | : Not available |
| Decomposition Temperature | : Not available |
| Flammability (solid, gas) | : Not available |
| Lower Flammable Limit | : Not available |
| Upper Flammable Limit | : Not available |
| Vapor Pressure | : > 1000 hPa @50°C (122°F) |
| Relative Vapor Density at 20 °C | : Not available |
| Relative Density | : Not available |
| Specific gravity / density | : 0.97 - 1.4 g/ml @21°C (69.8°F) |
| Specific Gravity | : Not available |
| Solubility | : Insoluble in water. |
| Partition Coefficient: N-octanol/water | : Not available |
| Viscosity | : 25- 42 dPa*s @20°C (68°F) |
| Percent VOC Content Catalyzed | Less than 50 grams per liter |
| Explosion Data – Sensitivity to Mechanical Impact | : Not expected to present an explosion hazard due to mechanical impact. |
| Explosion Data – Sensitivity to Static Discharge | : Static discharge could act as an ignition source. |

SECTION 10: STABILITY AND REACTIVITY

Reactivity: Product may polymerize at 60°C (>140°F), causing an exothermic reaction which may cause container damage or fire. May react with peroxides, oxidizers, and incompatibilities.

Chemical Stability: Highly flammable liquid and vapor. May form flammable/explosive vapor-air mixture.

Possibility of Hazardous Reactions: Hazardous polymerization may occur.

Conditions to Avoid: Direct sunlight. Extremely high or low temperatures. Heat. Ignition sources. Incompatible materials.

Incompatible Materials: Strong acids. Strong bases. Strong oxidizers.

Hazardous Decomposition Products: Carbon oxides (CO, CO₂). May release flammable gases. Toxic gases. Nitrogen oxides. Hydrocarbons. Methyl methacrylate. Oxides of titanium.

SECTION 11: TOXICOLOGICAL INFORMATION

Information on Toxicological Effects - Product

Acute Toxicity: Harmful if swallowed.

LD50 and LC50 Data:

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Parapro Roof Membrane Resin (Gray, White); Paracoat; Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Parapro Flashing (Gray, White); Paracoat Sand (Gray, White) | |
| ATE US (oral) | 1749.78 mg/kg body weight |

Skin Corrosion/Irritation: Causes skin irritation.

Serious Eye Damage/Irritation: Causes serious eye irritation.

Respiratory or Skin Sensitization: May cause allergy or asthma symptoms or breathing difficulties if inhaled. May cause an allergic skin reaction.

Germ Cell Mutagenicity: May cause genetic defects.

Teratogenicity: Not available

Carcinogenicity: May cause cancer.

Specific Target Organ Toxicity (Repeated Exposure): Not classified

Reproductive Toxicity: May damage fertility or the unborn child.

Specific Target Organ Toxicity (Single Exposure): May cause respiratory irritation. May cause drowsiness or dizziness.

Aspiration Hazard: Not classified

Symptoms/Injuries After Inhalation: May cause respiratory irritation. Exposure may produce an allergic reaction. May cause drowsiness or dizziness.



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

Symptoms/Injuries After Skin Contact: Causes skin irritation. May cause an allergic skin reaction.

Symptoms/Injuries After Eye Contact: Causes eye irritation.

Symptoms/Injuries After Ingestion: Swallowing a small quantity of this material will result in serious health hazard.

Chronic Symptoms: May damage fertility. May damage the unborn child. May cause heritable genetic damage. May cause cancer.

Information on Toxicological Effects - Ingredient(s)

LD50 and LC50 Data:

| | |
|-----------------------------------------------------------------|--------------------------|
| Methyl methacrylate (80-62-6) | |
| LD50 Oral Rat | 7900 mg/kg |
| LC50 Inhalation Rat | 4632 ppm/4h |
| 2-Ethylhexyl acrylate (103-11-7) | |
| LD50 Oral Rat | 4435 mg/kg |
| LD50 Dermal Rabbit | 7522 mg/kg |
| Quartz (14808-60-7) | |
| LD50 Oral Rat | > 5000 mg/kg |
| LD50 Dermal Rat | > 5000 mg/kg |
| Titanium dioxide (13463-67-7) | |
| LD50 Oral Rat | > 10000 mg/kg |
| Naphtha, petroleum, hydrodesulfurized heavy (64742-82-1) | |
| LD50 Oral Rat | > 5000 mg/kg |
| LD50 Dermal Rabbit | > 3160 mg/kg |
| Solvent naphtha, petroleum, light aromatic (64742-95-6) | |
| LD50 Dermal Rabbit | > 2000 mg/kg |
| LC50 Inhalation Rat | 3400 ppm/4h |
| ATE US (gases) | 3,400.00 ppmV/4h |
| Methyl methacrylate (80-62-6) | |
| IARC Group | 3 |
| 2-Ethylhexyl acrylate (103-11-7) | |
| IARC Group | 3 |
| Quartz (14808-60-7) | |
| IARC Group | 1 |
| National Toxicity Program (NTP) Status | Known Human Carcinogens. |
| Titanium dioxide (13463-67-7) | |
| IARC Group | 2B |

SECTION 12: ECOLOGICAL INFORMATION

Toxicity

Ecology - General: Harmful to aquatic life with long lasting effects.

| | |
|-----------------------------------------|------------------------------------------------------------------------------------|
| Methyl methacrylate (80-62-6) | |
| LC50 Fish 1 | 243 - 275 mg/l (Exposure time: 96 h - Species: Pimephales promelas [flow-through]) |
| EC50 Daphnia 1 | 69 mg/l (Exposure time: 48 h - Species: Daphnia magna) |
| LC 50 Fish 2 | 125.5 - 190.7 mg/l (Exposure time: 96 h - Species: Pimephales promelas [static]) |
| 2-Ethylhexyl acrylate (103-11-7) | |
| EC50 Daphnia 1 | 17.45 mg/l (Exposure time: 48 h - Species: Daphnia magna) |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | |
|----------------------------------------------------------------|----------------------------------------------------------------|
| Solvent naphtha, petroleum, light aromatic (64742-95-6) | |
| LC50 Fish 1 | 9.22 mg/l (Exposure time: 96 h - Species: Oncorhynchus mykiss) |
| EC50 Daphnia 1 | 6.14 mg/l (Exposure time: 48 h - Species: Daphnia magna) |

Persistence and Degradability Not available

Bioaccumulative Potential

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Parapro Roof Membrane Resin (Gray, White); Paracoat; Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Parapro Flashing (Gray, White); Paracoat Sand (Gray, White) | |
| Bioaccumulative Potential | Not established. |
| Methyl methacrylate (80-62-6) | |
| Log Pow | 0.7 |
| 2-Ethylhexyl acrylate (103-11-7) | |
| Log Pow | 4.64 (at 25 °C) |

Mobility in Soil Not available

Other Adverse Effects

Other Information: Avoid release to the environment.

SECTION 13: DISPOSAL CONSIDERATIONS

Waste Disposal Recommendations: Dispose of waste material in accordance with all local, regional, national, provincial, territorial and international regulations.

Additional Information: Handle empty containers with care because residual vapors are flammable.

SECTION 14: TRANSPORT INFORMATION

In Accordance with DOT

Proper Shipping Name : PAINT
Hazard Class : 3
Identification Number : UN1263
Label Codes : 3
Packing Group : II
ERG Number : 128



In Accordance with IMDG

Proper Shipping Name : PAINT
Hazard Class : 3
Identification Number : UN1263
Packing Group : II
Label Codes : 3
EmS-No. (Fire) : F-E
EmS-No. (Spillage) : S-E



In Accordance with IATA

Proper Shipping Name : PAINT
Packing Group : II
Identification Number : UN1263
Hazard Class : 3
Label Codes : 3
ERG Code (IATA) : 3L



In Accordance with TDG

Proper Shipping Name : PAINT
Packing Group : II
Hazard Class : 3
Identification Number : UN1263
Label Codes : 3





**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

SECTION 15: REGULATORY INFORMATION

US Federal Regulations

Parapro Roof Membrane Resin (Gray, White); Paracoat; Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Parapro Flashing (Gray, White); Paracoat Sand (Gray, White)

SARA Section 311/312 Hazard Classes

Fire hazard
Immediate (acute) health hazard
Delayed (chronic) health hazard

Methyl methacrylate (80-62-6)

Listed on the United States TSCA (Toxic Substances Control Act) inventory
Listed on United States SARA Section 313

SARA Section 313 - Emission Reporting

1.0 %

2-Ethylhexyl acrylate (103-11-7)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Quartz (14808-60-7)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Titanium dioxide (13463-67-7)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Naphtha, petroleum, hydrodesulfurized heavy (64742-82-1)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

Solvent naphtha, petroleum, light aromatic (64742-95-6)

Listed on the United States TSCA (Toxic Substances Control Act) inventory

US State Regulations

Quartz (14808-60-7)

U.S. - California - Proposition 65 - Carcinogens List

WARNING: This product contains chemicals known to the State of California to cause cancer.

Titanium dioxide (13463-67-7)

U.S. - California - Proposition 65 - Carcinogens List

WARNING: This product contains chemicals known to the State of California to cause cancer.

Methyl methacrylate (80-62-6)

U.S. - California - Toxic Air Contaminant List (AB 1807, AB 2728)
U.S. - Colorado - Hazardous Wastes - Discarded Chemical Products, Off-Specification Species, Container and Spill Residues
U.S. - Connecticut - Hazardous Air Pollutants - HLVs (30 min)
U.S. - Connecticut - Hazardous Air Pollutants - HLVs (8 hr)
U.S. - Delaware - Pollutant Discharge Requirements - Reportable Quantities
U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Acceptable Ambient Concentrations
U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Emission Levels (ELs)
U.S. - Idaho - Occupational Exposure Limits - TWAs
U.S. - Illinois - Toxic Air Contaminants
U.S. - Louisiana - Reportable Quantity List for Pollutants
U.S. - Maine - Air Pollutants - Hazardous Air Pollutants
U.S. - Massachusetts - Allowable Ambient Limits (AALs)
U.S. - Massachusetts - Allowable Threshold Concentrations (ATCs)
U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 2
U.S. - Massachusetts - Oil & Hazardous Material List - Reportable Quantity
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 2



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

RTK - U.S. - Massachusetts - Right To Know List
U.S. - Massachusetts - Threshold Effects Exposure Limits (TEs)
U.S. - Massachusetts - Toxics Use Reduction Act
U.S. - Michigan - Occupational Exposure Limits - TWAs
U.S. - Michigan - Polluting Materials List
U.S. - Minnesota - Chemicals of High Concern
U.S. - Minnesota - Hazardous Substance List
U.S. - Minnesota - Permissible Exposure Limits - TWAs
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - 24-Hour
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - Annual
U.S. - New Jersey - Discharge Prevention - List of Hazardous Substances
U.S. - New Jersey - Environmental Hazardous Substances List
RTK - U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - New Jersey - Special Health Hazards Substances List
U.S. - New York - Occupational Exposure Limits - TWAs
U.S. - New York - Reporting of Releases Part 597 - List of Hazardous Substances
U.S. - North Dakota - Air Pollutants - Guideline Concentrations - 1-Hour
U.S. - North Dakota - Air Pollutants - Guideline Concentrations - 8-Hour
U.S. - North Dakota - Hazardous Wastes - Discarded Chemical Products, Off-Specification Species, Container and Spill Residues
U.S. - Oregon - Permissible Exposure Limits - TWAs
RTK - U.S. - Pennsylvania - RTK (Right to Know) - Environmental Hazard List
RTK - U.S. - Pennsylvania - RTK (Right to Know) List
U.S. - Rhode Island - Air Toxics - Acceptable Ambient Levels - 24-Hour
U.S. - South Carolina - Toxic Air Pollutants - Maximum Allowable Concentrations
U.S. - South Carolina - Toxic Air Pollutants - Pollutant Categories
U.S. - Tennessee - Occupational Exposure Limits - TWAs
U.S. - Texas - Effects Screening Levels - Long Term
U.S. - Texas - Effects Screening Levels - Short Term
U.S. - Vermont - Hazardous Waste - Hazardous Constituents
U.S. - Vermont - Permissible Exposure Limits - TWAs
U.S. - Washington - Dangerous Waste - Dangerous Waste Constituents List
U.S. - Washington - Dangerous Waste - Discarded Chemical Products List
U.S. - Washington - Permissible Exposure Limits - STELs
U.S. - Washington - Permissible Exposure Limits - TWAs
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 25 Feet to Less Than 40 Feet
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 40 Feet to Less Than 75 Feet
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights 75 Feet or Greater
U.S. - Wisconsin - Hazardous Air Contaminants - All Sources - Emissions From Stack Heights Less Than 25 Feet

2-Ethylhexyl acrylate (103-11-7)

U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Groundwater Reportable Concentration - Reporting Category 2
U.S. - Massachusetts - Oil & Hazardous Material List - Reportable Quantity
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 1
U.S. - Massachusetts - Oil & Hazardous Material List - Soil Reportable Concentration - Reporting Category 2
RTK - U.S. - Massachusetts - Right To Know List
RTK - U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - New Jersey - Special Health Hazards Substances List
RTK - U.S. - Pennsylvania - RTK (Right to Know) List
U.S. - Texas - Effects Screening Levels - Long Term
U.S. - Texas - Effects Screening Levels - Short Term

Quartz (14808-60-7)

U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Acceptable Ambient Concentrations



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

U.S. - Idaho - Non-Carcinogenic Toxic Air Pollutants - Emission Levels (ELs)
U.S. - Idaho - Occupational Exposure Limits - Mineral Dusts
U.S. - Illinois - Toxic Air Contaminant Carcinogens
U.S. - Illinois - Toxic Air Contaminants
U.S. - Maine - Chemicals of High Concern
RTK - U.S. - Massachusetts - Right To Know List
U.S. - Michigan - Occupational Exposure Limits - TWAs
U.S. - Minnesota - Chemicals of High Concern
U.S. - Minnesota - Hazardous Substance List
U.S. - Minnesota - Permissible Exposure Limits - TWAs
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - 24-Hour
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - Annual
RTK - U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - New Jersey - Special Health Hazards Substances List
U.S. - New York - Occupational Exposure Limits - Mineral Dusts
U.S. - New York - Occupational Exposure Limits - TWAs
U.S. - Oregon - Permissible Exposure Limits - Mineral Dusts
RTK - U.S. - Pennsylvania - RTK (Right to Know) List
U.S. - Tennessee - Occupational Exposure Limits - TWAs
U.S. - Texas - Effects Screening Levels - Long Term
U.S. - Texas - Effects Screening Levels - Short Term
U.S. - Vermont - Permissible Exposure Limits - TWAs
U.S. - Washington - Permissible Exposure Limits - STELs
U.S. - Washington - Permissible Exposure Limits - TWAs

Titanium dioxide (13463-67-7)

U.S. - Connecticut - Hazardous Air Pollutants - HLVs (30 min)
U.S. - Connecticut - Hazardous Air Pollutants - HLVs (8 hr)
U.S. - Idaho - Occupational Exposure Limits - TWAs
U.S. - Illinois - Toxic Air Contaminant Carcinogens
RTK - U.S. - Massachusetts - Right To Know List
U.S. - Michigan - Occupational Exposure Limits - TWAs
U.S. - Minnesota - Chemicals of High Concern
U.S. - Minnesota - Hazardous Substance List
U.S. - Minnesota - Permissible Exposure Limits - TWAs
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - 24-Hour
U.S. - New Hampshire - Regulated Toxic Air Pollutants - Ambient Air Levels (AALs) - Annual
RTK - U.S. - New Jersey - Right to Know Hazardous Substance List
U.S. - New York - Occupational Exposure Limits - TWAs
U.S. - North Dakota - Air Pollutants - Guideline Concentrations - 8-Hour
U.S. - Oregon - Permissible Exposure Limits - TWAs
RTK - U.S. - Pennsylvania - RTK (Right to Know) List
U.S. - Tennessee - Occupational Exposure Limits - TWAs
U.S. - Texas - Effects Screening Levels - Long Term
U.S. - Texas - Effects Screening Levels - Short Term
U.S. - Vermont - Permissible Exposure Limits - TWAs
U.S. - Washington - Permissible Exposure Limits - STELs
U.S. - Washington - Permissible Exposure Limits - TWAs

Naphtha, petroleum, hydrodesulfurized heavy (64742-82-1)

U.S. - Maine - Chemicals of High Concern
U.S. - Minnesota - Chemicals of High Concern
U.S. - Minnesota - Chemicals of High Concern - Persistent Bioaccumulative Toxins





**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| |
|----------------------------------------------------------------|
| U.S. - Texas - Effects Screening Levels - Long Term |
| U.S. - Texas - Effects Screening Levels - Short Term |
| Solvent naphtha, petroleum, light aromatic (64742-95-6) |
| U.S. - Texas - Effects Screening Levels - Long Term |
| U.S. - Texas - Effects Screening Levels - Short Term |

Canadian Regulations

| | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parapro Roof Membrane Resin (Gray, White); Paracoat; Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin; Terapro Wearing Layer; Parapro Flashing (Gray, White); Paracoat Sand (Gray, White) | |
| WHMIS Classification | Class B Division 2 - Flammable Liquid Class D Division 2 Subdivision A - Very toxic material causing other toxic effects Class D Division 2 Subdivision B - Toxic material causing other toxic effects |
|  |  |

| | |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Methyl methacrylate (80-62-6) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| Listed on the Canadian IDL (Ingredient Disclosure List) | |
| IDL Concentration 1 % | |
| WHMIS Classification | Class B Division 2 - Flammable Liquid Class D Division 2 Subdivision B - Toxic material causing other toxic effects Class D Division 2 Subdivision A - Very toxic material causing other toxic effects |

| | |
|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 2-Ethylhexyl acrylate (103-11-7) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| Listed on the Canadian IDL (Ingredient Disclosure List) | |
| IDL Concentration 1 % | |
| WHMIS Classification | Class B Division 3 - Combustible Liquid Class D Division 2 Subdivision B - Toxic material causing other toxic effects |

| | |
|---------------------------------------------------------|------------------------------------------------------------------------------------|
| Quartz (14808-60-7) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| Listed on the Canadian IDL (Ingredient Disclosure List) | |
| IDL Concentration 1 % | |
| WHMIS Classification | Class D Division 2 Subdivision A - Very toxic material causing other toxic effects |

| | |
|-------------------------------------------------------|------------------------------------------------------------------------------------|
| Titanium dioxide (13463-67-7) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| WHMIS Classification | Class D Division 2 Subdivision A - Very toxic material causing other toxic effects |

| | |
|-----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Naphtha, petroleum, hydrodesulfurized heavy (64742-82-1) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| WHMIS Classification | Class D Division 2 Subdivision A - Very toxic material causing other toxic effects Class D Division 2 Subdivision B - Toxic material causing other toxic effects Class B Division 2 - Flammable Liquid |

| | |
|----------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Solvent naphtha, petroleum, light aromatic (64742-95-6) | |
| Listed on the Canadian DSL (Domestic Substances List) | |
| WHMIS Classification | Class B Division 3 - Combustible Liquid Class D Division 2 Subdivision B - Toxic material causing other toxic effects |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

Fatty acids, C18, unsaturated, dimers, reaction products with N,N-dimethyl-1,3-propanediamine and 1,3-propanediamine (162627-17-0)

WHMIS Classification | Class D Division 2 Subdivision B - Toxic material causing other toxic effects

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the SDS contains all of the information required by CPR.

SECTION 16: OTHER INFORMATION, INCLUDING DATE OF PREPARATION OR LAST REVISION

Revision Date : 10/19/2022

Other Information : This document has been prepared in accordance with the SDS requirements of the OSHA Hazard Communication Standard 29 CFR 1910.1200.

GHS Full Text Phrases:

| | |
|----------------------------------|------------------------------------------------------------------|
| Acute Tox. 3 (Oral) | Acute toxicity (oral) Category 3 |
| Acute Tox. 4 (Dermal) | Acute toxicity (dermal) Category 4 |
| Acute Tox. 4 (Inhalation:vapour) | Acute toxicity (inhalation:vapour) Category 4 |
| Acute Tox. 4 (Oral) | Acute toxicity (oral) Category 4 |
| Aquatic Acute 1 | Hazardous to the aquatic environment - Acute Hazard Category 1 |
| Aquatic Acute 2 | Hazardous to the aquatic environment - Acute Hazard Category 2 |
| Aquatic Acute 3 | Hazardous to the aquatic environment - Acute Hazard Category 3 |
| Aquatic Chronic 1 | Hazardous to the aquatic environment - Chronic Hazard Category 1 |
| Aquatic Chronic 2 | Hazardous to the aquatic environment - Chronic Hazard Category 2 |
| Aquatic Chronic 3 | Hazardous to the aquatic environment - Chronic Hazard Category 3 |
| Asp. Tox. 1 | Aspiration hazard Category 1 |
| Carc. 1A | Carcinogenicity Category 1A |
| Carc. 1B | Carcinogenicity Category 1B |
| Carc. 2 | Carcinogenicity Category 2 |
| Comb. Dust | Combustible Dust |
| Eye Irrit. 2A | Serious eye damage/eye irritation Category 2A |
| Eye Irrit. 2B | Serious eye damage/eye irritation Category 2B |
| Flam. Liq. 1 | Flammable liquids Category 1 |
| Flam. Liq. 2 | Flammable liquids Category 2 |
| Flam. Liq. 3 | Flammable liquids Category 3 |
| Flam. Liq. 4 | Flammable liquids Category 4 |
| Muta. 1B | Germ cell mutagenicity Category 1B |
| Repr. 2 | Reproductive toxicity Category 2 |
| Resp. Sens. 1 | Respiratory sensitization Category 1 |
| Skin Irrit. 2 | Skin corrosion/irritation Category 2 |
| Skin Sens. 1 | Skin sensitization Category 1 |
| STOT RE 1 | Specific target organ toxicity (repeated exposure) Category 1 |
| STOT SE 3 | Specific target organ toxicity (single exposure) Category 3 |
| STOT SE 3 | Specific target organ toxicity (single exposure) Category 3 |
| H224 | Extremely flammable liquid and vapor |
| H225 | Highly flammable liquid and vapor |
| H226 | Flammable liquid and vapor |
| H227 | Combustible liquid |
| | May form combustible dust concentrations in air |
| H301 | Toxic if swallowed |
| H302 | Harmful if swallowed |



**Parapro Roof Membrane Resin (Gray, White); Parapro Flashing (Gray, White);
Terapro Base Resin; Terapro Flashing Resin; Terapro VTS Resin;
Terapro Wearing Layer; Paracoat (Gray, White, Sand); Paracoat HS**

According To Federal Register / Vol. 77, No. 58 / Monday, March 26, 2012 / Rules And Regulations

| | |
|------|---------------------------------------------------------------------------|
| H304 | May be fatal if swallowed and enters airways |
| H312 | Harmful in contact with skin |
| H315 | Causes skin irritation |
| H317 | May cause an allergic skin reaction |
| H319 | Causes serious eye irritation |
| H320 | Causes eye irritation |
| H332 | Harmful if inhaled |
| H334 | May cause allergy or asthma symptoms or breathing difficulties if inhaled |
| H335 | May cause respiratory irritation |
| H336 | May cause drowsiness or dizziness |
| H340 | May cause genetic defects |
| H350 | May cause cancer |
| H351 | Suspected of causing cancer |
| H361 | Suspected of damaging fertility or the unborn child |
| H372 | Causes damage to organs through prolonged or repeated exposure |
| H400 | Very toxic to aquatic life |
| H401 | Toxic to aquatic life |
| H402 | Harmful to aquatic life |
| H410 | Very toxic to aquatic life with long lasting effects |
| H411 | Toxic to aquatic life with long lasting effects |
| H412 | Harmful to aquatic life with long lasting effects |

Party Responsible for the Preparation of This Document

Todd Franks

Siplast, Inc.

1111 Highway 67 South

Arkadelphia, AR 71923

870-246-8095 x 1108

ussds@siplast.com

This information is based on our current knowledge and is intended to describe the product for the purposes of health, safety and environmental requirements only. It should not therefore be construed as guaranteeing any specific property of the product.

North America GHS US 2012 & WHMIS