


INSIDE CORNER FABRICATION - 2 STEP "JOINT PATCH" UP DETAIL

PARASOLO HYBRID SYSTEM - INSULATED

LEGEND
 HEAT WELD

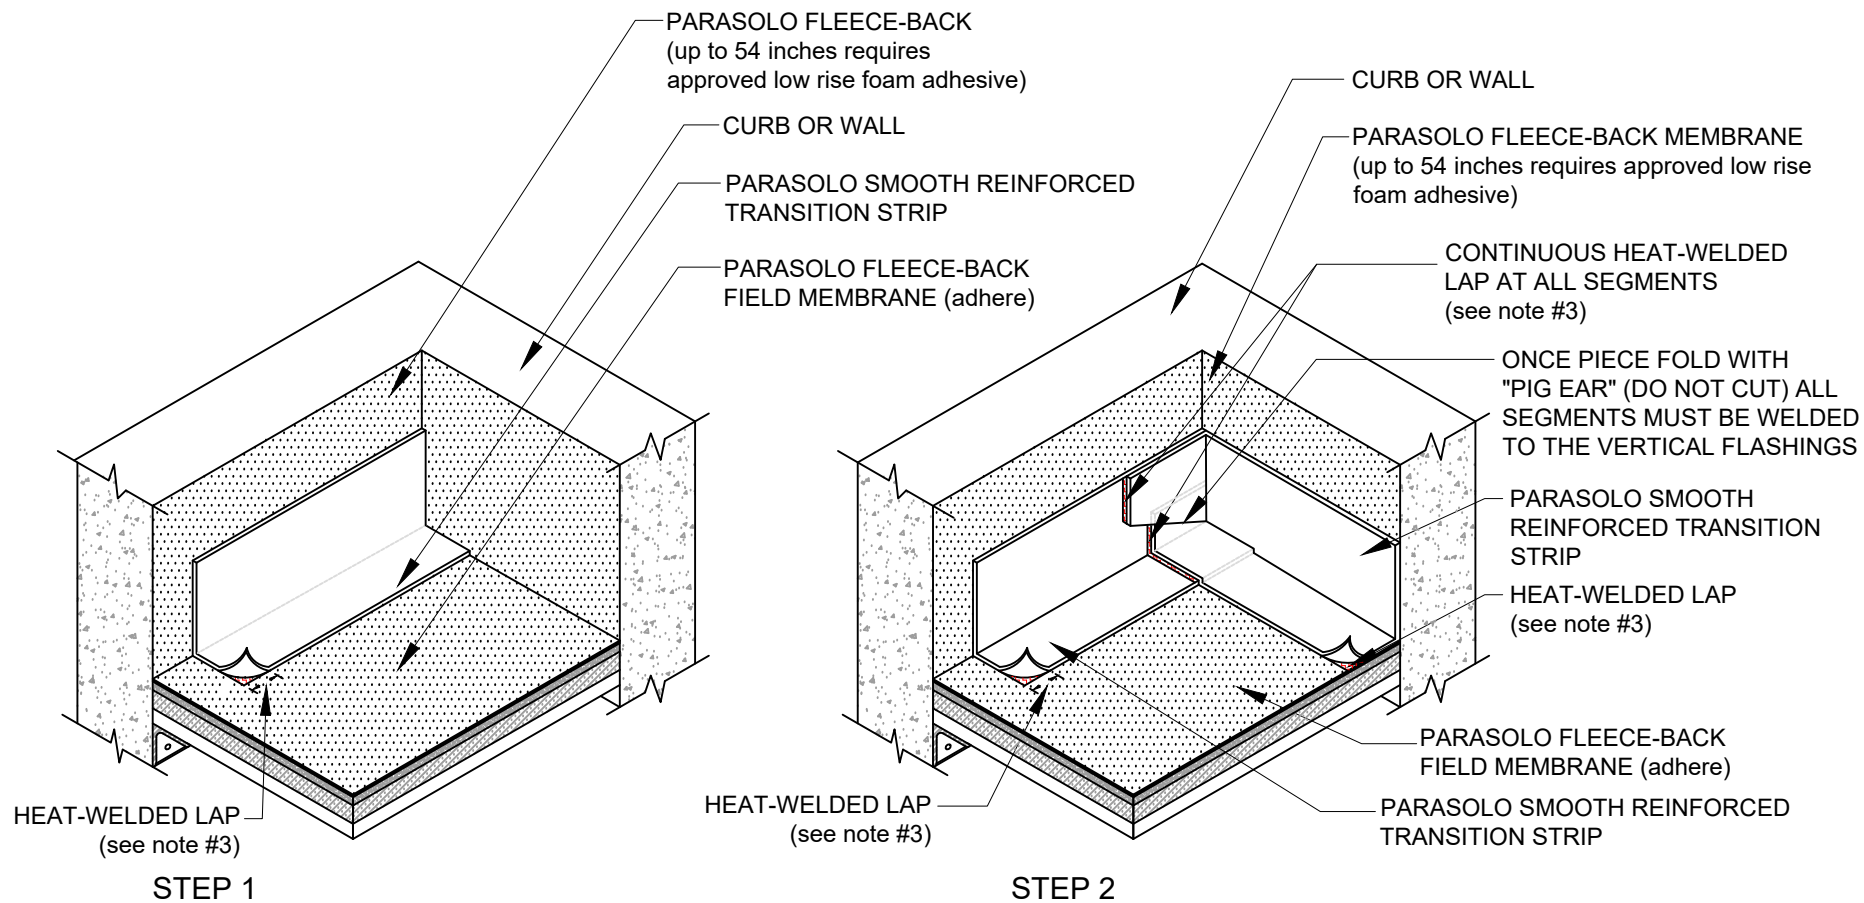

NOTES:

1. ALL SEGMENTS OF THE EAR MUST BE WELDED TOGETHER AND WELDED TO THE WALL.
2. CHECK SYSTEM SPECIFICATION FOR GUIDELINES ON ADHERING FLASHINGS.
3. FOR HEAT-WELDING LAPS USE 1" MINIMUM WELD TO 1-1/2" MAXIMUM WELD.
4. REQUIREMENTS AND RECOMMENDATIONS DETAILED IN CURRENT SIPLAST SPECIFICATIONS SHALL APPLY IN ADDITION TO THE ABOVE DRAWING.

CAUTION: SIPLAST RECOMMENDS THAT ALL PRACTICES PERTAINING TO INDUSTRY STANDARD TORCH SAFETY REQUIREMENTS AND GUIDELINES BE FOLLOWED. THIS INCLUDES PERFORMING A FIRE WATCH FOLLOWING ANY TORCH APPLICATIONS. ALWAYS HAVE APPROVED FIRE EXTINGUISHING EQUIPMENT NEARBY WHEN USING A TORCH.

Scale: NTS

REF: INSIDE CORNER FABRICATION - 2 STEP JOINT PATCH UP - PARASOLO - P20 - INSULATED

Detail Number:
DE-SP-37-15a



14911 Quorum Drive, Suite 600 - Dallas, Texas - 75254 (800) 922-8800

www.siplast.com

Rev: 06.06.2023